


# Technical Soaring

An International Journal



- Influence of target function selection on optimization of winglets

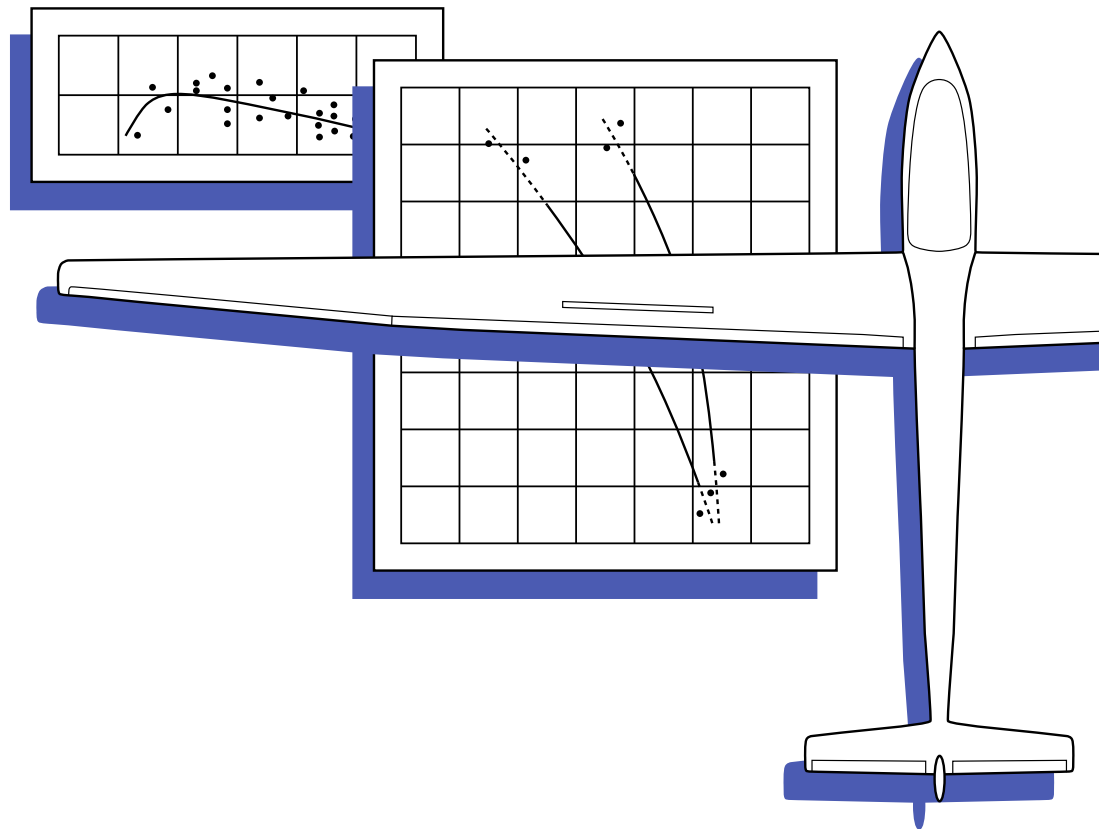

Organisation Scientifique et Technique Internationale du Vol à Voile (OSTIV)  
International Scientific and Technical Organization for Soaring  
[www.ostiv.org](http://www.ostiv.org)

# Technical Soaring



The Scientific, Technical and Operational Journal of  
the Organisation Scientifique et Technique Internationale du Vol à Voile  
(International Scientific and Technical Organization for Soaring)

Volume 42, Number 1

January — March 2018

## EDITOR-IN-CHIEF

Dr. Arne Seitz

## ASSOCIATE EDITORS

Prof. Dr. Zafer Aslan — *Turkey*

Chair, Scientific Section and Chair, Meteorological Panel

Prof. Dr. Mark Maughmer — *USA*

Chair, Technical Section

Dipl. Ing. Michael Greiner — *Germany*

Chair, Sailplane Development Panel

Richard Carlson — *USA*

Chair, Training and Safety Panel

Prof. Dr. Goetz Bramesfeld — *Canada*

Dr. Kurt Sermeus — *Canada*

## OSTIV PRESIDENT

Prof. Dr. Rolf Radespiel

*Germany*

## OSTIV VICE PRESIDENT

Prof. Dr. Mark Maughmer

*USA*

## MEMBERS OF THE OSTIV BOARD

Prof. Dr. Zafer Aslan — *Turkey*

Prof. Dr. Goetz Bramesfeld — *Canada*

Dipl. Ing. Michael Greiner — *Germany*

Dr. Judah Milgram — *USA*

Richard Carlson — *USA*

Dr. Ing. Lukáš Popelka — *Czech Republic*

Dipl. Ing. Gerhard Robertson — *Australia*

## Journal Online Manager and Archivist

Dr. Kurt Sermeus

## Copy editing/Layout

Dr. Arne Seitz

© 2018 Organisation Scientifique et Technique Internationale  
du Vol à Voile  
All rights reserved  
ISSN 0744-8996

From the Editor ..... 1

**The influence of target function selection on the optimization  
of winglets for the glider SB 15**

Jan Himisch and Kai Rohde-Brandenburger ..... 2

*Technical Soaring (TS)* documents recent advances in the science, technology and operations of motorless aviation.

*TS* is published quarterly by the Organisation Scientifique et Technique Internationale du Vol à Voile (International Scientific and Technical Organization for Soaring, OSTIV), c/o TU Braunschweig, Institute of Fluid Mechanics, Hermann-Blenk Str. 37, D-38108 Braunschweig, Germany. E-mail: [president@ostiv.org](mailto:president@ostiv.org); URL: [www.ostiv.org](http://www.ostiv.org).

Subscription is restricted to OSTIV members but material can be submitted by anyone. Annual dues are €25 for Individual/Local Club Membership; €80 for Scientific/Technical Organization/Library Membership and €250 for Active Members (National Aero Club Members of FAI). Students under 25 years of age may join free of charge.

Submitted research papers will be peer-reviewed. Guidelines for preparation and submission of manuscripts can be found in this issue and on the OSTIV website in the 'editor' section.

*TS* is online (full-color) at [journals.sfu.ca/ts/](http://journals.sfu.ca/ts/). Back issues, from Vol. 1, No. 1 to the current issue are online. OSTIV members have complete access to *TS* online; non-members may access titles and abstracts. Members should contact the webmaster, [Jannes.Neumann@t-online.de](mailto:Jannes.Neumann@t-online.de), for access.

The name Technical Soaring and its cover layout are fully rights-protected and belong to the Soaring Society of America; they are used by permission.

## Open Access Policy

**Reader Rights.** For the first twelve months following publication, only OSTIV members may download material. After twelve months, free download to all.

**Reuse Rights.** No reuse for the first twelve months, after which material may be reused in other works only with permission of the authors of the article.

**Copyrights** Authors retain copyright to the basic material. OSTIV retains copyright to the published version. Works that are inherently in the public domain will be noted as such on their title pages.

**Author posting rights** Authors may not post copies of their articles on websites until twelve months after publication, except for posting on a ResearchGate account owned by the author. After twelve months, author may distribute freely by any means and post to third-party repositories. Authors may distribute individual copies of their articles at any time.

**Archiving.** Authors may archive their own papers on the web and in Open-Access archives as follows. The version of the paper as first submitted to *Technical Soaring* may be archived at any time. (This will not disqualify the manuscript from publication in *TS*.) The version as published may be archived in Open-Access archives starting twelve months following publication. OSTIV may archive papers as published at any time.

**Machine Readability** After twelve months, article full text, metadata, and citations may be crawled or accessed without special permission or registration.

## Preparation of Manuscripts for *Technical Soaring*

*Technical Soaring (TS)* documents recent advances in the science, technology and operations of motorless aviation. *TS* welcomes original contributions from all sources.

**General Requirements** Manuscripts must be unclassified and cleared for public release. The work must not infringe on copyrights, and must not have been published or be under consideration for publication elsewhere. Authors must sign and submit a copyright form at time of submission. The form is available at [www.ostiv.org](http://www.ostiv.org).

**Language** All manuscripts submitted to *TS* must be in English. Submissions requiring extensive editing may be returned to author for proofreading and correction prior to review.

**Layout** Submit manuscripts in single-column, double spaced layout with all figures and tables at end, one per page.

**Electronic submissions** are preferred. Most data file formats are acceptable, with PDF preferred. Submit one file containing the complete paper including all figures, tables, and captions. Paper submissions will also be accepted — contact Editor for submission details.

**Length** There is no fixed length limit. At the discretion of the Editor-in-chief (EIC), manuscripts may be returned to the author for reduction in length.

**Structure** Organize papers as needed in sections, subsections, and sub-subsections.

**Title** A title block is required with author name(s), affiliation(s), location, and contact info (email address preferred).

**Abstract** All papers require a summary-type abstract consisting of a single, self-contained paragraph. Suggest 100 to 150 words. Acronyms may be introduced in the abstract, but do not cite references, figures, tables, or footnotes.

**Nomenclature** If the paper uses more than a few symbols, list and define them in a separate table. Otherwise, explain them in the text where first used. Define acronyms in the text following first use.

**Introduction** An Introduction is required that states the purpose of the work and its significance with respect to prior literature, and allows the paper to be understood without undue reference to other sources.

**Conclusions** The Conclusions section should review the main points

of the paper. Do not simply replicate the abstract. Do not introduce new material or cite references, figures, or tables in the Conclusions section.

**Acknowledgments** Inclusion of support and/or sponsorship acknowledgments is strongly encouraged.

**Citations** Cite with bibliographic reference numbers in brackets (e.g. “[7]”). Do not cite Internet URLs unless the website itself is the subject of discussion.

**References** All references listed in the References section must be cited in the text. List references in order of first citation in the text. Any format is acceptable as long as all citation data are provided. At a minimum, all types of entries require title, year and manner of publication. Provide full names of all authors. Do not list Internet URLs as sources.

**Captions** All figures and tables require captions. Do not use the caption to explain line styles and symbols — use a legend instead.

**Color** Color graphics are acceptable. Avoid using color to distinguish data sets in figures — instead, use line styles, symbol shapes and fill patterns.

**Footnotes** Use footnotes sparingly. Do not footnote to cite literature.

**Numbering** All figures, tables, footnotes and references must be referenced in the text and are numbered sequentially in order of first reference. Equations are numbered only if they are referenced by number in the text. Number every page.

**How to submit** Email all electronic material to the EIC at [ts-editor@ostiv.org](mailto:ts-editor@ostiv.org) and contact the EIC at [arne.seitz@dlr.de](mailto:arne.seitz@dlr.de) if acknowledgement is not received.

**Peer Review** Manuscripts will be peer-reviewed before being accepted for publication. Authors may choose between two options: A full peer review with two independent and anonymous reviewers. In this case authors are welcome to suggest names of reviewers. The second option is the *TS* Fast Track Scheme, with the manuscript being reviewed by the EIC or an Associate Editor. With the publication of an article it will be documented in a footnote on the first page of the article which option was chosen by the author. EIC or the assigned Associate Editor may be contacted by the author at any time for updates on the status of their review.

**Charges** *Technical Soaring* does not require a publication page-charge.

## **From the Editor**

### **Publication Date**

This issue is the first of Volume 42 of *TS*, corresponding to January-March 2018. For the record, the issue was published in August, 2019.

### **Acknowledgments**

We gratefully acknowledge Associate Editor Götz Bramesfeld, who oversaw the review of the Himisch and Rohde-Brandenburger paper in this issue.

Very Respectfully,

Arne Seitz

Editor-in-Chief, *Technical Soaring*

[ts-editor@ostiv.org](mailto:ts-editor@ostiv.org)

# The influence of target function selection on the optimization of winglets for the glider SB 15

Jan Himisch, Kai Rohde-Brandenburger

kai.rohde-brandenburger@dlr.de

*Institute of Aerodynamics and Flow Technology*

*German Aerospace Center (DLR), Braunschweig, Germany*

## Abstract

The present paper is about an investigation into the influence of target function selection on the final results of an automated process for glider optimization. For this purpose the design parameters of a winglet for the glider SB 15 were exemplarily optimized by using different target functions, like minimum drag for a single target lift or a combination of target lifts. Results indicate that the influence of the target function for the used example is less significant than one might expect. Additionally the validation results for the process-chain that was developed are presented: not only proving the capability of the chain to predict drag deltas, but also indicating its limitations for the prediction of absolute drag values.

## Introduction

In order to apply an optimization procedure to an aero design problem, one has first to develop a stable program chain to accurately evaluate all necessary aerodynamic characteristics of a complete sailplane configuration. When using such a chain within an optimization environment, one has also to define a feasible set of parameters with the respective boundaries and constraints as well as a target function for the given optimization task.

Whereas the parameters and the constraints are strongly dependent on the specific optimization task, the process chain and the target function are, within the scope of glider-optimization, more universally applicable. While it is obvious that the scope of a glider optimization is the increase of average cross-country speed, the calculation of the cross-country speed is dependent on the correct application of the weather-model which is a difficult task. Finally it is not necessarily intended to determine the exact cross-country speed, but to identify the parameters leading to the most beneficial geometry. Therefore it might be asked, if the selection of the target function has a significant influence on the geometric properties. The present paper tries to answer this question with the example of optimizing a new set of winglets for the glider SB 15 currently under construction at Akaflieg Braunschweig.

## Process chain

An overview showing the principle of the applied process chain is sketched in Fig 1. The main components are

the optimizer, a multi non-planar lifting-line method developed by Horstmann (program “Lifting-Line”, [1]) and the well known airfoil design and analysis program system “Xfoil” from Drela, [2].

With respect to this process chain, the total drag coefficient  $C_D$  of a sailplane configuration at a given total lift coefficient  $C_L$  can be split up into three components:

$$C_D = C_{Di} + C_{Dp} + C_{D,rest}$$

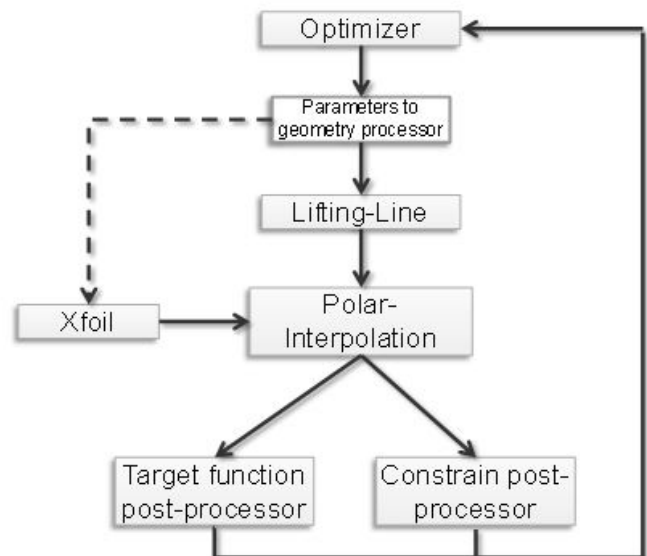


Fig. 1: Principle of the optimization process chain.

Presented at the XXXII OSTIV Congress, Leszno, Poland, 8 – 13 Jan. 2014  
This article was peer reviewed by two independent, anonymous reviewers. The review process was overseen by Associate Editor Götz Bramesfeld

Here,  $C_{Di}$  is the induced drag coefficient which is provided by “Lifting-Line”, while the second coefficient,  $C_{Dp}$ , is the profile drag of the complete wing. It is integrated from local profile drag coefficients  $c_{dp}$  along span. These, in turn, are computed with “Xfoil” based on local lift coefficients  $c_l$  according to the spanwise load distribution obtained from “Lifting-Line”. A more detailed description of the procedure can be found in [3].

The last term  $C_{D,rest}$  contains the drag created by fuselage, vertical and horizontal tailplane as well as interference effects.  $C_{D,rest}$  can be estimated by comparing simulation results with flight performance measurements of similar glider types or, if not available, out of text books like [4].

The additional tools of the process chain satisfy pre- and postprocessing requirements, like e.g. the target function post-processor to compute the average cross-country flight speed, based on the computed lift to drag polar and the applied weather model. While “Xfoil” and “Lifting-Line” are available free of charge, the used optimizer-environment “pyranha” is a DLR internal python-based optimization platform. “pyranha” contains different classes of optimization strategies like evolutionary algorithms or algorithms for gradient based optimization. In the context of the present study the “SUBPLEX” algorithm [5] is used for optimization. This algorithm can be regarded as a fair compromise between evolutionary algorithms which are very good in finding the global optimum but are very slow, and gradient based methods which are very fast but tend to find only local optimums. A disadvantage of said optimization algorithm is the fact that its performance decreases significantly when using more than approximately fifteen parameters.

### The optimization problem

The design task selected to test the optimization procedure was to optimize a new set of winglets for the glider SB 15 of the Akaflieg Braunschweig. The 20m double seater class glider SB 15 is based on the 18m span SB 14 wings which are elongated in the inner part and already equipped with state of the art winglets [6]. The existing baseline provides a good reference for the optimization procedure. The current winglets can be detached from the wings to allow an easy exchange for any planned performance flight test. The optimization is therefore limited to the region outside the wing-winglet connection as shown in Fig. 2.

With respect to the parameterization of the winglet geometry, Fig. 3 provides an overview of the optimized quantities. Logically the span is fixed due to the 20m constraint and therefore was not changed. The winglet airfoil was not optimized and was chosen to be the same as the airfoil designed for the reference winglet by Scholz [6]. The most important parameters are consequently the winglet height  $h$ , the twist distribution, varying from  $\epsilon_{Foot}$  to  $\epsilon_{Tip}$ , and the winglet planform given by the local chord length varying from foot ( $l_{Foot}$ ) to tip ( $l_{Tip}$ ).

The cant angle  $\nu_{wi}$  was identified to be a parameter of minor importance, as in the present case the space between the wing-winglet connection of the existing wing and the span-limit

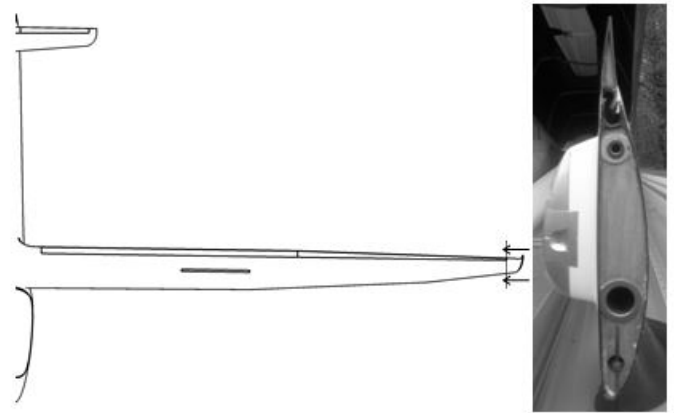


Fig. 2: SB 14 (and SB 15) wing-winglet connection.

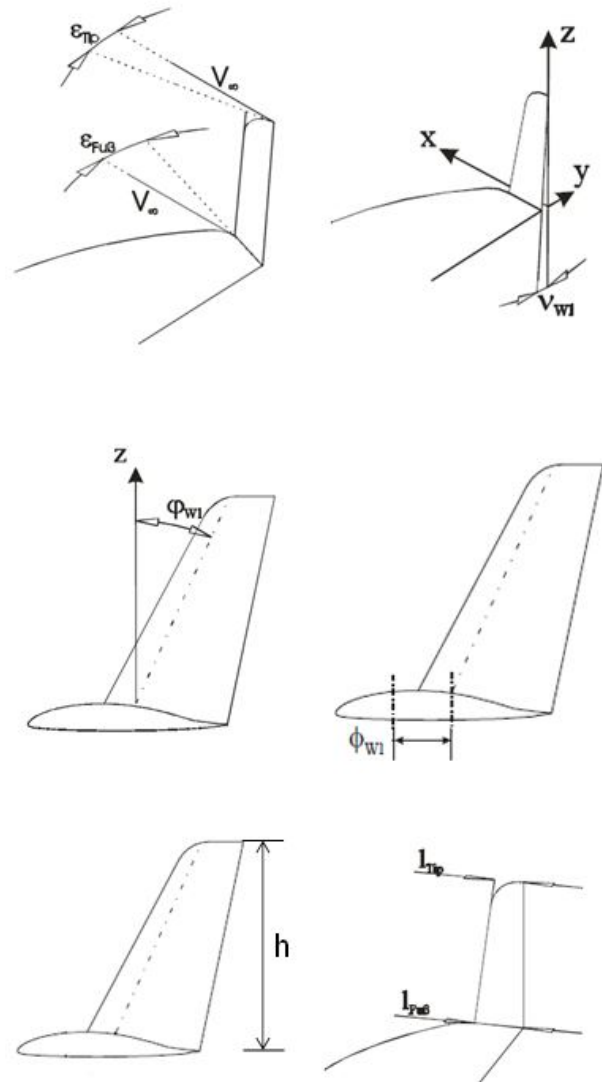


Fig. 3: Overview of optimization parameters.

of 20m leaves very little room for variation which is especially true for large winglets. Furthermore, a smoothly rounded wing-winglet junction instead of a sharp edge that might induce flow separation was also considered to be of importance. Therefore, the cant angle was set to a fixed value, leading to a nearly vertical planar-part of the winglet in flight.

Sweep angle  $\phi_{Wi}$  and chordwise positioning  $\phi_{Wi}$  of the winglet were also considered, but those parameters have only a minor influence on the optimization results using the discussed process-chain. This does not mean that those parameters are not important for the detailed design, but in order to demonstrate the influence of target functions onto the optimization result, their influence is of minor importance.

### Target functions

As stated in the abstract, the main goal of the present work is the investigation into the influence of different target functions on the optimization results. For the context of this paper, three different types of target functions have been analyzed:

1. The simplest form of a target function is the minimization of drag for a constant lift coefficient. Within the scope of this work optimizations for three different lift-coefficients have been carried out:

- $C_L = 1.3$  representing a low speed situation like circling in a thermal.
- $C_L = 0.9$  leading to a result most beneficial in order to increase the maximum achievable glide ratio  $(C_L/C_D)_{max}$
- $C_L = 0.5$  aiming to minimize the impact of a winglet between strong thermals flying with relatively high speeds

2. In order to optimize the winglet to be beneficial over a broader range of airspeeds, the combined drag for more than one lift coefficient needs to be reduced. The selection of lift coefficients and the weighting between those can be expected to have a strong influence on the optimization result. In order to select those values properly a detailed analysis of logger data as it was done by Sherrer [7] would be beneficial. This paper includes optimization results for an equally weighted combination of glide ratio  $C_L/C_D$  at  $C_{L,1} = 1.3$  and  $C_{L,2} = 0.5$  leading to the subsequent objective function (with  $\bar{X}$  being the set of free optimization parameters):

$$\min f(\bar{X}) = \frac{C_{D,1}(C_{L,1}, \bar{X})}{C_{L,1}} + \frac{C_{D,2}(C_{L,2}, \bar{X})}{C_{L,2}}$$

3. The third class of target functions are those based on the computation and maximization of the average cross-country speed, based on a predefined weather model. In the context of the present paper the newly defined weather model is based on the one developed by Horstmann [8] with extensions from Ronig [9].

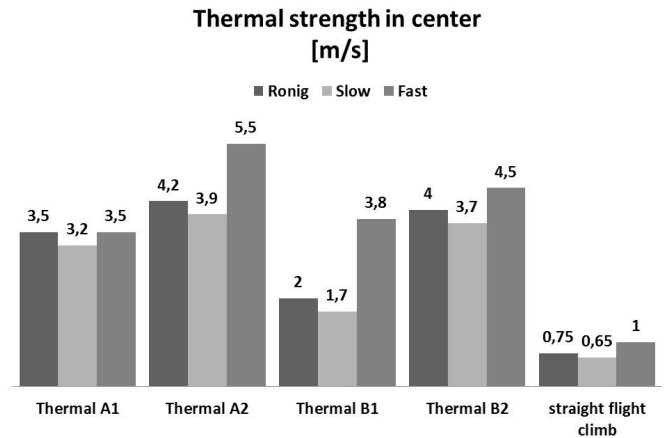


Fig. 4: Comparison of upwind strength in center of thermal for different weather models.

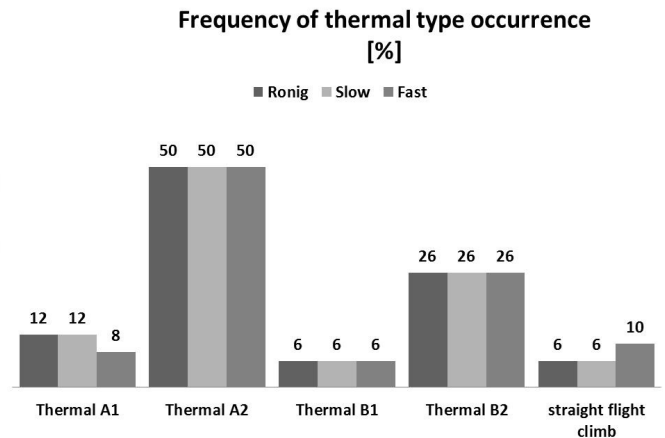


Fig. 5: Frequency of thermal type occurrence during a cross-country flight.

Figure 4 and 5 summarize the differences between the original weather model as defined by Ronig [9] and the two weather-models (“Slow” and “Fast”) that were used in the context of the optimizations discussed in this paper. The use of two weather models with small differences in thermal strength and thermal type occurrence should help to identify the impact of the weather model selection on the optimization result.

### Optimization results

In order to illustrate the influence of the target function on the optimization result, the most relevant parameter (the winglet height) has been set to be constant in the automated optimization process. A sweep of different heights has been set manually while all other free parameters defined in Fig. 2 have been optimized by the automated process chain. Therefore it is possible to illustrate the influence of the parameter winglet height on the different target functions, as shown in Fig. 6 to 8 .

The resulting geometries were then analyzed on the basis of

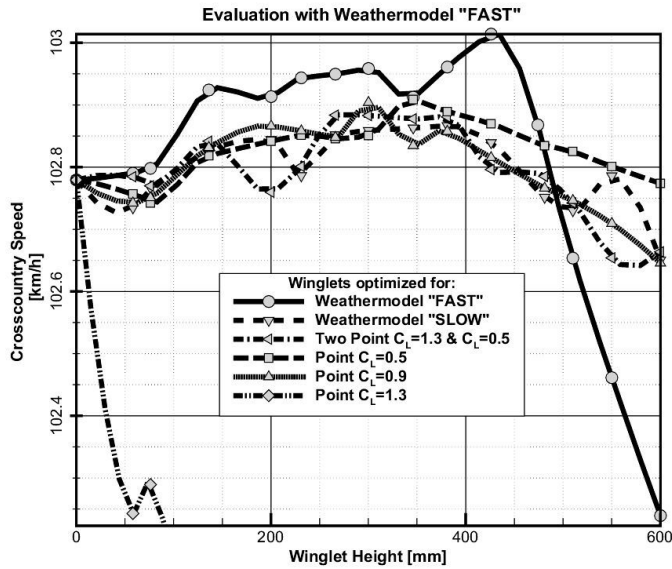


Fig. 6: Cross-country speed for model "FAST" of optimized winglets with varying height  $h$ .

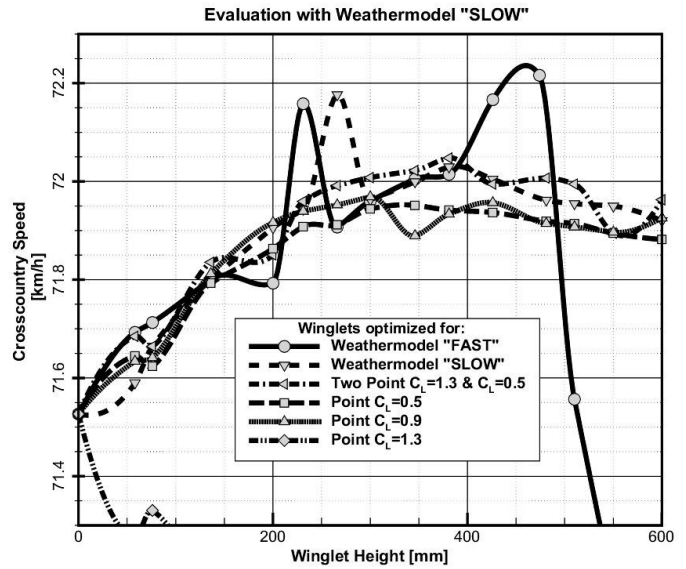


Fig. 7: Cross-country speed for model "SLOW" of optimized winglets with varying height  $h$ .

the different target functions, meaning that for Fig. 6 and Fig. 7 the mean cross-country speed for all optimized geometries were computed while in Fig. 8 the glide ratio of all those configurations at a lift coefficient of 1.3 are shown. Consequently the configurations optimized using the same target function as used for the analysis of the results are showing the best performance in the corresponding figure. As those performance results are just a rough indicator for the real performance, due to the lack of knowledge of what kind of weather the glider will really experience, their exact values are of minor importance. Of driving interest is the value of the parameter for which a target function maximum (or respective minimum) is predicted. In order to properly analyze the results, it would be nice to see a smooth curve having a clear maximum.

Figure 6 and 7 have quite bumpy curves with several local minima and maxima. If dealing with optimization task this is normally a good indication for having either a non-reliable analysis method (at least in the magnitude of the required precision), or looking at a non-converged optimization. As the convergence levels can be easily monitored and the feasibility of the applied methods will be demonstrated within the next section, where a comparison with flight performance tests are shown, the possibility of the optimizer finding a local instead of the global minimum must be considered as well. This assumption is supported by the fact that the simpler target functions (single  $C_L$  drag minimizations) provide smoother curves, which hints at a connection between complexity of target function and the likelihood of finding a local optimum. A respective test using an evolutionary optimization algorithm, which is very expensive but very likely (compared to "SUBPLEX") to find the global optimum is a still pending task. Nevertheless, the results are sufficient enough to

analyze the connection between performance prediction for the optimized geometries and the influence of the target function onto those results.

Despite the analysis based on the weather models "FAST" and "SLOW" of the configurations optimized for a  $C_L$  of 1.3, all results are indicating a most beneficial winglet height between 350mm and 450mm. While for the good weather conditions,

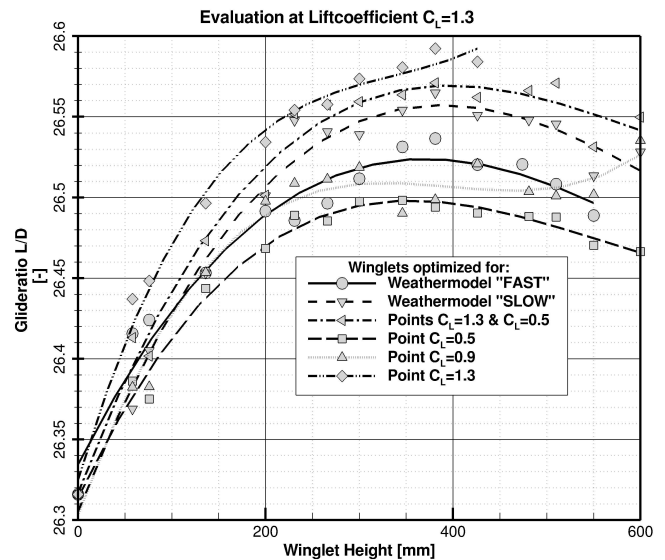


Fig. 8: Glide ratio  $L/D$  at lift coefficient  $C_L = 1.3$  of optimized winglets with varying height  $h$ .



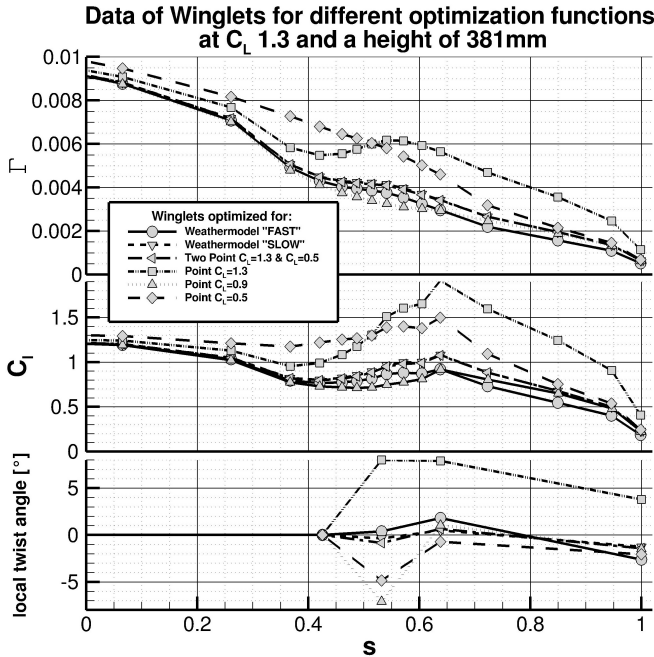


Fig. 9: Load distribution  $\Gamma$ , local lift coefficient  $c_l$  and twist angle variation  $\varepsilon$  vs. dimensionless true length  $s$ .

represented by weather model “FAST”, the difference between a smaller winglet (e.g. 200mm) and a larger one (e.g. 350mm) is relatively small, the impact of size difference increases while expecting worse conditions as represented by weather model “SLOW” and single point optimization for “ $C_L = 1.3$ ”.

Analyzing the glide ratios of the different configurations for a  $C_L$  of 1.3 (Fig. 8), the only difference occurs for the configurations optimized using the “ $C_L = 1.3$ ” target-function. The reason for this difference can be explained by analyzing the different load distributions resulting from applying the different target functions. Figure 9 and 10 show load distributions for a glider lift coefficient of  $C_L = 1.3$  and  $C_L = 0.3$  for a selected winglet height of 381mm. Additionally the local section twist and the local lift coefficients are shown as well (note: all quantities are plotted versus the dimensionless true length  $s$ , which starts at the wing to winglet joint, see e.g. in Fig. 11). The most striking fact is that the circulation, and therefore the local loading, is the largest for the configuration optimized with the target function “ $C_L = 1.3$ ”. This high loading is achieved by retwisting the sections instead of increasing the local chord-length, as can be seen in the graphs for local lift-coefficient-distribution and the local twist-distribution. This is a plausible result: The optimizer will try to achieve an optimal load distribution for minimum induced drag with, in order to keep friction based drag at a minimum, a surface area as small as possible. This might lead to a good result for the design point used, but can also cause trouble in off-design ( $C_L$  outside the section’s “laminar bucket” with low profile drag) as has occurred in this case.

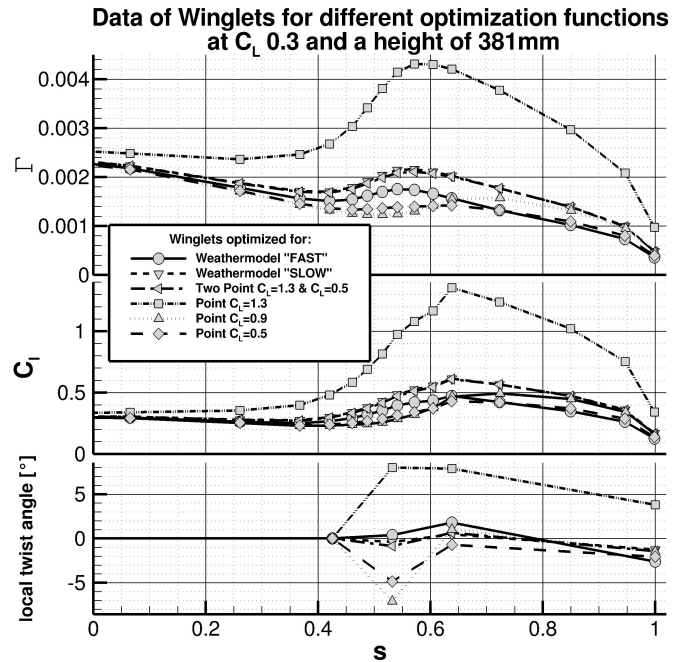


Fig. 10: Load distribution  $\Gamma$ , local lift coefficient  $c_l$  and twist angle variation  $\varepsilon$  vs. dimensionless true length  $s$ .

### Comparison with flight test

Based on the optimization results, a new winglet shape was designed and fabricated. As a detailed RANS-based analysis was not performed and the “Lifting-Line” based chain cannot sufficiently resolve the highly three-dimensional flow in the transitional area from (horizontal) wing to (vertical) winglet, recent developments in how to design such a transitional area (Theurich, [10]) were considered in order to avoid drag penalties due to interference effects between wing and winglet. In Fig. 11 the newly designed winglet can be visually compared to the already existing SB 14 winglet, which was subsequently used as a reference for performance investigations. Mounted on the SB 14, the common testbed, both winglets were flight tested during the Idaflieg summer meet 2012.

The results of the flight performance tests are summarized in Fig. 12. In order to use these results for validation purposes, the SB 14 glider was recalculated in both configurations, equipped with the baseline winglets and the newly designed winglets, using the process chain described above. In the grey boxes within Fig. 12, the measured maximum performance deltas (optimized winglet vs. reference winglet) are compared to the calculated maximum performance deltas. The optimized winglet improves the performance of the glider at the speed of its best glide ratio and for lower airspeeds, as relevant for flying in thermals, while having small performance disadvantages for airspeeds that are relevant during interthermal cruise flight in good weather conditions. While the tendencies are predicted correctly by the computational model, the absolute values are generally under



Fig. 11: Baseline SB 14 winglet (left), the reference for the performance flight tests conducted, and the optimized SB 15 winglet (right).

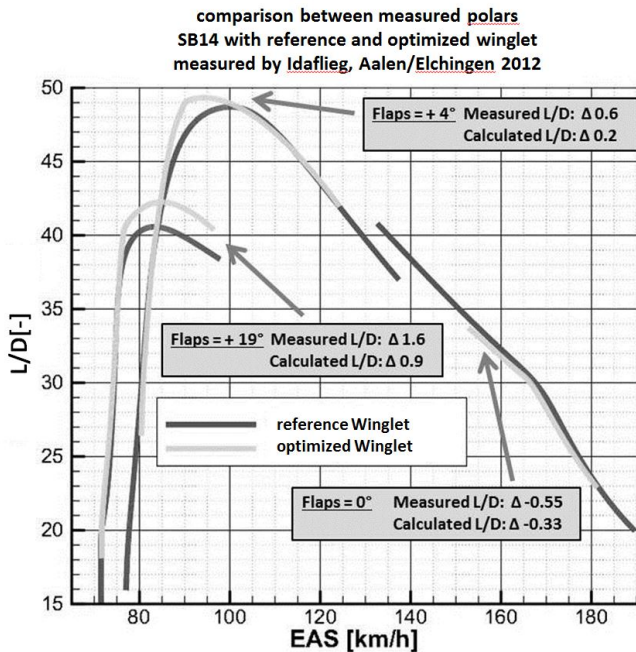


Fig. 12: Comparison of measured and calculated glider performance expressed by the glide ratio  $L/D$  versus airspeed.

predicted by the computational model. The most striking, not predicted, difference occurs for flap setting  $4^\circ$ , where the optimized winglet seems to perform significantly better at lower speeds. While there is no proven explanation for this result, it is assumed that the updated transitional area, i.e. the improved blending from wing to winglet, provides the most likely explanation for that difference. This assumption is based on the fact that, firstly, the airfoil sections, which might explain that kind of result as well, are identical for both winglets, and, secondly, both winglets have been built using similar manufacturing technologies. In the context of this paper, the results are illustrating the benefits and limits of the applied computational models. While the general influences of the applied geometry modification on induced and profile drag seem to be predicted reasonably well to successfully perform an optimization task, a precise prediction of absolute values for performance penalties or benefits cannot be expected. Therefore the method presented seems to represent a good compromise between accuracy and computational speed.

## Conclusions

A computational chain for planform optimization has been presented and validated. It was shown that the chain is accurate enough to be used in the context of optimization, even if considering limits in representing all drag characteristics in full detail. Regarding the target function selection, the opinion of the authors is that a clever selection of lift coefficients for a multi-point optimization will provide a robust target function, while more complex target functions like, for example, a weather-model-based function might lead to complications with respect to the identification of the global minimum if applying a reasonably fast optimization model. A more detailed description of the optimization process and its results is given in a report written by Rohde-Brandenburger [11].

## References

- [1] Horstmann, K. H., "Ein Mehrfach-Traglinienverfahren und seine Verwendung für Entwurf und Nachrechnung nicht-planarer Fülgelanordnungen." FB 87-51, DFVLR, 1987, ISSN 0171-1342.
- [2] Drela, M., "XFOIL 6.96." <http://web.mit.edu/drela/Public/web/xfoil/>.
- [3] Himisch, J., "Winglet Shape and Load Optimization with a numerical supported Lifting Line Method at Transonic Flow Conditions." 12th AIAA/ISSMO Multidisciplinary Analysis and Optimization Conference, AIAA 2008-5902, 2008.
- [4] Thomas, F., *Fundamentals of Sailplane Design*, College Park Press, College Park, MD, USA, 1999.
- [5] Rowan, T., *Functional Stability Analysis of Numerical Algorithms*, Ph.D. thesis, Department of Computer Sciences, University of Texas, Austin, TX, USA, 1990.

- [6] Scholz, P., *Entwurf und Analyse eines Winglets für Segelflugzeuge am Beispiel des Segelflugzeuges SB 14*, diploma thesis, DLR Institute of Aerodynamics and Flow Technology, Braunschweig, 2000.
- [7] Scherrer, M., “Flight Template – A tool for the optimization of sailplane aerodynamic for cross country flight at preliminary design stage.” *Technical Soaring*, Vol. 32, No. 3, 2008, pp. 85–92.
- [8] Horstmann, K. H., “Neue Aufwindverteilungen und ihr Einfluss auf die Auslegung von Segelflugzeugen.” Presented at the XV OSTIV Congress, Räyskälä, Finland, 1976.
- [9] Ronig, S., *Überarbeitung des Indexsystems für Segelflugzeuge zur Verbesserung der Chancengleichheit auf Wettbewerben mit Flugzeugen unterschiedlicher Leistungsfähigkeit*, diploma thesis, DLR Institute of Aerodynamics and Flow Technology, Braunschweig, 1995.
- [10] Theurich, F. and Himisch, J., “Wing tip shape for a wing, in particular for an aircraft.” Patent WO2008061739.
- [11] Rohde-Brandenburger, K., *Einfluss der Optimierungsgrundlage auf das Wingletdesign am Beispiel des Segelflugzeuges SB 15*, diploma thesis, DLR Institute of Aerodynamics and Flow Technology, Braunschweig, 2012.