


Technical Soaring

An International Journal

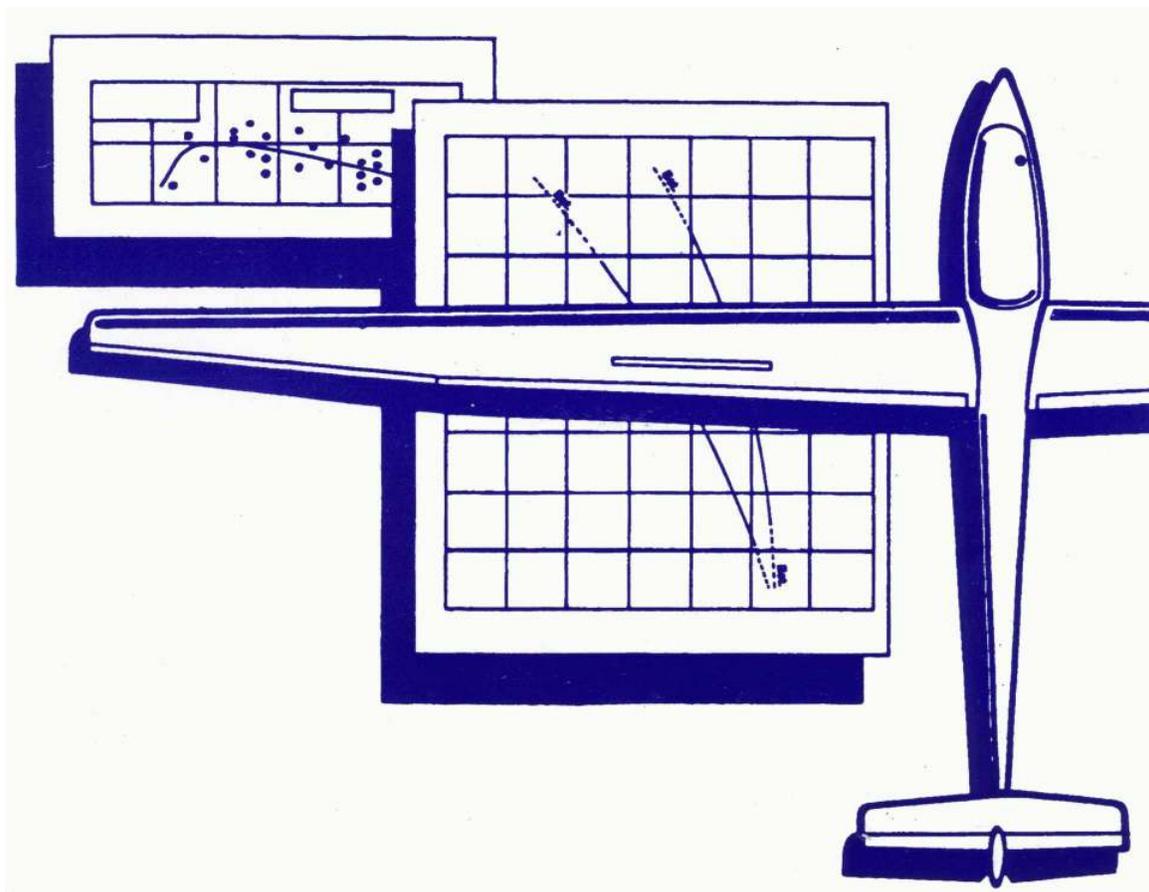

- **Crashworthiness with Silicone Keel Beams**

*The Journal of the
Organisation Scientifique et Technique Internationale du Vol à Voile
(International Scientific and Technical Organization for Gliding)
ISSN 0744-8996*



EDITOR

Dr. Judah Milgram

ASSOCIATE EDITORS

Prof. Dr. Zafer Aslan — *Turkey*

Chair, Scientific Section and Chair, Meteorological Panel

Prof. Dr. Mark Maughmer — *USA*

Chair, Technical Section

Dipl. Ing. Helmut Fendt — *Germany*

Chair, Sailplane Development Panel

Dipl. Ing. Ian Oldaker — *Canada*

Chair, Training and Safety Panel

Prof. Dr. Goetz Bramesfeld — *Canada*

JOURNAL ON-LINE MANAGER

Em. Prof. Dr. Edward (Ward) Hindman

OSTIV PRESIDENT

Em. Prof. Ir. Loek M. M. Boermans

The Netherlands

OSTIV VICE PRESIDENT

Dipl. Ing. Christoph Kensché

Germany

MEMBERS OF THE OSTIV BOARD

Dipl. Ing. John Ashford — *Australia*

Dipl. Ing. Helmut Fendt — *Germany*

Prof. Dr. Edward Hindman — *USA*

Prof. Dr. Mark Maughmer — *USA*

Dipl. Ing. Ian Oldaker — *Canada*

Dr. Ing. Lukáš Popelka — *Czech Republic*

Dr. Hermann Trimmel — *Austria*

Copy editing/Layout: Judah Milgram
Washington, DC USA

© 2014 Organisation Scientifique et Technique Internationale
du Vol à Voile
All rights reserved
ISSN#0744-8996

Volume 38, Number 2

From the Editor 15

Improvement of Sailplane Crashworthiness through Keel
Beams with Silicone Cores

U. Schuster, K. Wolf 16

The objective of *Technical Soaring (TS)* is to document recent advances in the science, technology and operations of motorless aviation.

TS is published quarterly by the Organisation Scientifique et Technique Internationale du Vol à Voile (International Scientific and Technical Organization for Gliding, OSTIV); Kluyverweg 1, NL-2629 HS Delft, The Netherlands, Tel: +31 15 278 6387, fax: +31 15 278 3533, E-mail: l.m.m.boermans@tudelft.nl, URL: www.ostiv.org.

Subscription is restricted to OSTIV members but material can be submitted by anyone. Rates per calendar year are €25 for students under 25 years of age, €45 for Individual/Local Club Membership; €80 for Scientific/Technical Organization/Library Membership and €250 for Active Members (National Aero Club Members of FAI). Issues are sent by air overseas then surface bulk delivery.

Submitted research papers will be peer-reviewed. Guidelines for preparation and submission of manuscripts can be found in this issue and on the OSTIV website in the 'editor' section.

TS is in print (grey-shade) and online (full-color) at journals.sfu.ca/ts/. The print copy will continue indefinitely. Back issues, from Vol. 21, No. 1 (1997) to the current issue, are online; earlier issues will be put online as possible. OSTIV members have complete access to *TS* online; non-members access titles and abstracts. Members should contact the webmaster, Jannes.Neumann@t-online.de, for access. Back issues can be purchased from either the OSTIV Secretariat or, in the USA, by email from bernaldd@juggernaut.com. A quick-start guide to access *TS* online is on the OSTIV website.

An index of *TS* (Vol. 1 through Vol. 34) is at soaringweb.org/Soaring_Index/... *Technical Soaring*. Issues are indexed by author, subject and issue. Additional information on *TS* and information on OSTIV Publications can be found on the OSTIV website in a searchable Publications Index.

The name *Technical Soaring* and its cover layout are fully rights-protected and belong to the Soaring Society of America; they are used by permission.

From the Editor

Acknowledgments

Our thanks to Helmut Fendt for overseeing the review of Uwe Schuster's paper in this issue, and for all our hardworking Associate Editors who are busy bringing papers to readiness for future issues.

Shoulders of Giants

What better way to start a sailplane research project — or any research project for that matter — than a solid literature search.

We strongly encourage authors, when preparing articles for *Technical Soaring* or for any other journal (*especially* for other journals!), to review and cite *TS* to the greatest extent possible.

Thanks to the efforts of *TS*-Online Manager and EIC-emeritus Ward Hindman, back issues of *Technical Soaring* from Vol. 20, No. 1 (January–March, 1996) to the current issue are now online at journals.sfu.ca/ts/. The project continues and earlier issues will be made available as soon as possible.

An index to Volumes 10–37 (1986–2013) of *Technical Soaring* may be found at the OSTIV web site, <http://ostiv.org> under the “Publications” tab. The index also covers OSTIV Publications I–XVIII (1950–1985). The OSTIV Publications served as the *de-facto* OSTIV Congress Proceedings until *TS* came under the OSTIV roof in 1988.

An additional *TS* index covering the early years starting with *TS* 1(1) may be found at:

[http://soaringweb.org/Soaring_Index/...
Technical_Soaring/HomePage.html](http://soaringweb.org/Soaring_Index/...Technical_Soaring/HomePage.html)

This index is a joint effort of Michael Stecker, Gonzalo García-Granero, Bertha Ryan, and John Leibacher.

OSTIV Publications and early *TS* issues are not currently available online, but if any of our readers needs a copy of an early article for a project, please contact me and I'll see what I can do.

Consider L^AT_EX!

Authors may have noticed in the preparation guidelines that we prefer all manuscripts submitted to *TS* to be prepared using L^AT_EX¹. *TS* itself is typeset with L^AT_EX so submitting L^AT_EX files greatly facilitates the typesetting process. We are however not adamant about this, and accept manuscripts prepared using other software as well. We will even accept typewritten sheets if necessary. The creative process is after all idiosyncratic and we would never discourage authors from using the software (or typewriter!) with which they feel most comfortable.

This is nevertheless one of those cases where a little discomfort in learning something new can result in a considerable payoff. Some reasons why authors might consider L^AT_EX:

- Superior ability to build mathematical equations of arbitrary complexity using plain-text commands — there's no need to click around hunting for symbols and dragging them into equation templates. Type `\frac{1}{2}\rho V^2` in the source file and after processing you'll get $\frac{1}{2}\rho V^2$. Another example:

$$\frac{1}{2\pi} \int_0^\pi \frac{\gamma \sin \theta \, d\theta}{\cos \theta - \cos \theta_0} = V_\infty \left(\alpha - \frac{dz}{dx} \right)_0$$

produces:

$$\frac{1}{2\pi} \int_0^\pi \frac{\gamma \sin \theta \, d\theta}{\cos \theta - \cos \theta_0} = V_\infty \left(\alpha - \frac{dz}{dx} \right)_0$$

- Powerful features for matrices and arrays
- User-defined macros
- Automatic numbering and resolution of citations, bibliographic entries, references, figures, tables, footnotes and equations
- Floating figures and tables that are placed automatically.
- Bibliographic database system (BibTeX) that automatically generates bibliographies in *TS*-required format — or any other format, for that matter. The format can be changed via style-files without changing the database itself.
- Edit input files with a simple plain-text editor, or (I am given to understand) use one of the available GUIs.
- Available for Unix/Linux, Mac, and PC.

And by the way, it's free and benefits from a large and active online user community. If you want to give it a go, check out www.latex-project.org. A simple web search will yield many other useful sites and tutorials.

Finally, if you are an author using L^AT_EX to prepare a manuscript for *TS* and run into a typesetting problem that you can't solve, we will be glad to help to the best of our ability. Just email us.

Reminder: OSTIV Meteorology Panel Meeting

As reported in *TS* 38(1), Prof. Dr. Zafer Aslan, Chair of the OSTIV Scientific Section and the OSTIV Meteorological Panel Chair, writes:

“The next OSTIV Met Panel will be held in Zurich between 6 and 7 February, 2015. The Panel addresses all scientific and technical aspects of soaring flight including motor-gliding, hang-gliding, paragliding, ultra-light sailplanes and aero-modeling.

“Opportunity for presentation and discussion of papers is given in Meteorology, Climatology, Atmospheric Physics, and related areas.

“Deadline for Abstracts is January 9, 2015. There is no registration fee for the Panel.”

If you wish to participate in this meeting, please contact Prof. Aslan at zaslan@aydin.edu.tr

Respectfully,

Judah Milgram
Editor-in-Chief, *Technical Soaring*
milgram@cgpp.com

¹We use the official typography here when promoting L^AT_EX but it's just as acceptable to write “Latex.”

Improvement of Sailplane Crashworthiness through Keel Beams with Silicone Cores

U. Schuster

uwe.schuster@tu-dresden.de

K. Wolf

klaus.wolf@tu-dresden.de

*Institute of Aerospace Engineering
Technische Universität Dresden
D-01069 Dresden, Germany*

Abstract

Occupant safety is a major concern in the development of modern sailplanes. Particularly, the crashworthiness of cockpit structures is an important design consideration. In this paper a structural concept for a forward fuselage is presented which has been developed to improve the crash performance of sailplanes. The proposed design solution primarily addresses the issues of survival space integrity as well as occupant acceleration. It is based on the use of composite box beams filled by silicone rubber as crash elements in the lower cockpit structure. The elastomeric material was selected owing to its remarkable properties in terms of shock absorption and damping. The crash performance of this design concept was evaluated through numerical simulation using an explicit transient dynamic code. For this purpose a detailed finite element model of a generic glider fuselage was established comprising all relevant structural elements. Additionally, the model was equipped with occupant dummies which provided high fidelity acceleration data. A comprehensive parametric study was conducted which demonstrated the capability of the proposed keel beam concept to improve the crashworthiness of glider cockpit structures.

Introduction

The crashworthiness of sailplanes is essentially influenced by the fuselage and cockpit structural design. With regard to an aircraft ground impact, occupant safety primarily requires survival space integrity and, secondly, rather smooth accelerations instead of distinct peaks. Therefore, a variety of so-called crash elements have been developed in order to dissipate a significant portion of the kinetic energy of the aircraft through crushing or material failure [1–3]. A combination of a stiff cockpit and one or more dedicated crash elements can be considered the state of the art in terms of crashworthy glider design [1, 3–6]. Usually, their integration into the aircraft requires additional space. Also, extensive structural tailoring of the fuselage is necessary in order to support these crash elements and to prevent the cockpit from collapsing. These shortcomings as well as the recently tightened EASA CS-22 crashworthiness requirements [4] clearly indicate a demand for new design solutions in order to enhance occupant safety. This issue has been tackled in a research project which will be presented in the following. The research was particularly focused on exploring the capability of silicone rubber with regard to crashworthiness improvements of the cockpit structure.

Silicone energy absorbing material

Based on the results of a screening programme conducted on silicone rubber materials [7] the so called θ -6-Gel was selected as the most promising candidate for aircraft crash applications. It belongs to a family of materials known by the trade name α -Gel. Apart from θ -6 this family comprises five other silicone materials that primarily differ in stiffness and strength due to a specific production processing. Currently, α -Gel materials are exclusively offered by the Japanese Taica Corporation and are being utilized in a wide spectrum of applications, primarily for shock absorption and vibration damping [8, 9]. The term “gel” might be misleading in this context, because all members of the α -Gel group are elastomers exhibiting the constitutive behavior of rubber.

Table 1 summarizes the basic physical properties of θ -6. Regarding aircraft operation θ -6 offers superior resistance to ultraviolet light, humidity and ozone. Also epoxide-, phenol- and polyester resins do not impair the material which is an important feature when used in composite structures. Furthermore, contact with the human skin is harmless and the material does not emit toxic gases when burned [8]. More detailed information on the material characterization of θ -6 as well as on the development of a calibrated material model for the crash simulations can be found in [7].

Presented at the 2013 Segelflugsymposium, November 21–22 2013, Braunschweig, Germany

Table 1: Physical properties of θ -6-Gel [8]

Property	Value
Density [g/cm ³]	1.06
Tensile strength [kPa]	1580
Young's modulus [kPa]	670.3
Max. tensile strain [%]	480
Application temperature [°C]	-40 ~ 200

Parametric crash model for numerical simulations

A parametric finite element model of a glider fuselage was established, which comprises occupant dummies in order to allow for a reliable investigation of the crash behavior. The model permits an arbitrary initial aircraft attitude prior to impact as well as different laminate thicknesses of major structural elements. Figure 1 gives a general view of the baseline model which is derived from the two-seat glider D-B11, designed by the university gliding club *Akaflieg Dresden*. The fuselage structure of this aircraft is entirely made of carbon fibre reinforced plastics (CFRP). In the forward part of the fuselage foam core sandwich is applied whereas the tail boom is monolithic. To maintain a generic character all laminates have a stacking sequence resulting in quasi-isotropic properties. The view of the cockpit in Fig. 2 shows distinct upper longerons where CFRP laminates cover a foam core. The load bearing structure also includes a front frame, two stick bulkheads, consoles, a crossbar and the seat shells. Hip belts and shoulder straps fasten two 50th percentile dummies. To keep the simulation model simple and robust items such as canopy and instrument panels have been neglected. In view of an aircraft crash the masses located behind the occupants must be considered. Thus, wing, horizontal tail plane and main landing gear are modeled by point masses. Table 2 defines the laminate data of the baseline fuselage. The layer angles denoted by the index

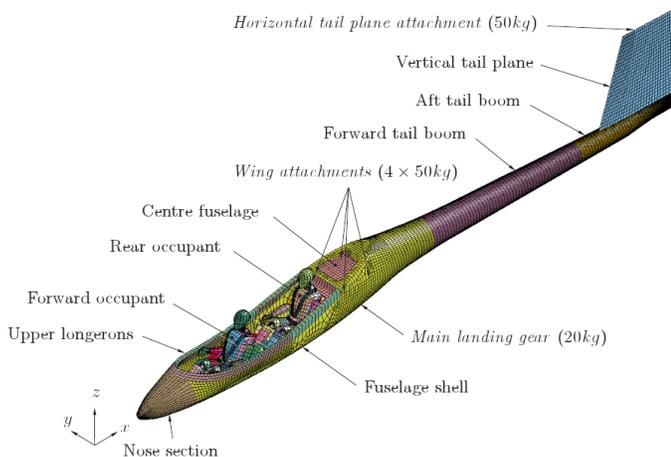


Fig. 1: Crash model baseline layout

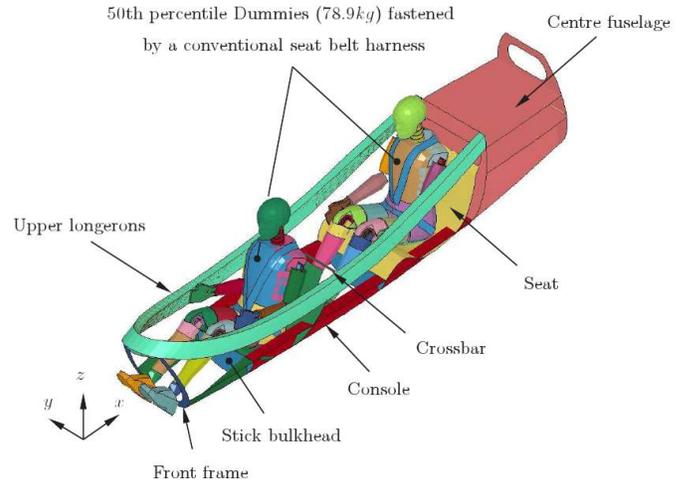


Fig. 2: Cockpit view of the baseline model (fuselage shell and nose section are not shown)

Table 2: Laminate data of the fuselage structure

Structural element	laminate stacking sequence	thickness [mm]		
		laminate	core	total
Fuselage shell	$[0_f/45_f/CORE/45_f/0_f]$	2×0.5	6.0	7.0
Nose section	$[0_f/45_f/CORE/45_f/0_f]$	2×2.0	5.0	9.0
Centre fuselage	$[0_f/45_f/CORE/45_f/0_f]$	2×2.0	4.0	8.0
Consoles	$[0_f/45_f/CORE/45_f/0_f]$	2×1.0	2.0	4.0
Stick bulkhead	$[0_f/45_f/CORE/45_f/0_f]$	2×1.0	2.0	4.0
Front frame	$[0_f/45_f/CORE/45_f/0_f]$	2×2.0	4.0	8.0
Seats	$[0_f/45_f/CORE/45_f/0_f]$	2×2.0	6.0	10.0
Forward tail boom	$[0_f/45_f]_s$	2.0	—	2.0
Aft tail boom	$[0_f/45_f]_s$	2.6	—	2.6
Upper longeron	$[0_f/45_f]_s$	2.0	—	2.0

f refer to fabric plies. Core thickness values apply to sandwich structures. Based on the mechanical properties from [10] a gross mass of 528.5 kg has been determined for baseline model.

All crash simulations have been conducted using the explicit finite element code LS-DYNA. During the crash, accelerations are recorded at the respective centre hip nodes of the forward and rear dummy in order to get information on the spinal loads of the occupants. These dummy models have been provided by the LS-PREPOST software.

The model incorporates numerous parameters which influence the crash behavior. This is especially true for friction coefficients, material properties and failure criteria as well as the

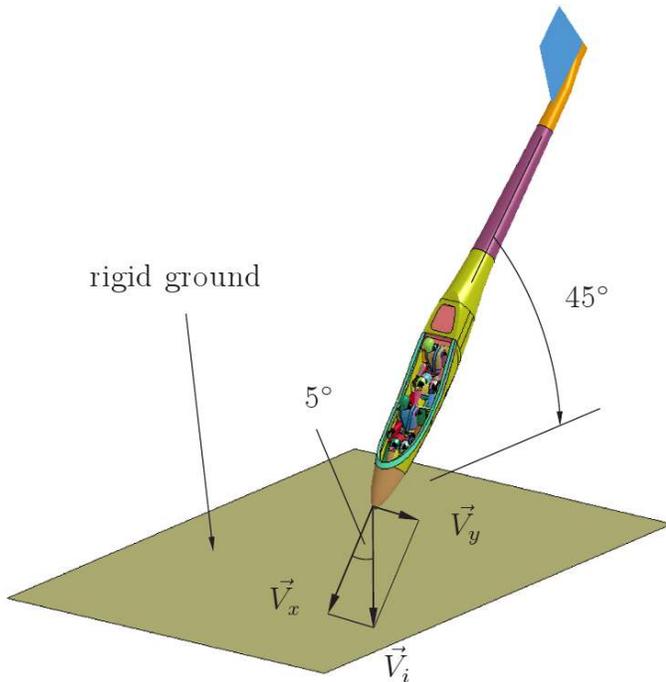


Fig. 3: Initial aircraft attitude

unknown reaction of the soil. Hence, it is virtually impossible to calibrate the crash model by means of existing experimental data. However, this does not impair the utilization for comparative analyses. Particularly, the model is very well suited to investigate the effect of design changes on the crashworthiness compared to the baseline aircraft.

Crash behavior of the baseline model

In a first step the crash model has been employed to get an understanding of the basic crash characteristics. The initial aircraft attitude considered in this investigation is shown in Fig. 3. The aircraft has a flight path angle of -45° and zero angle of attack, i.e. the velocity vector points towards the fuselage longitudinal axis. As shown in [1] approximately 50% of all glider accidents exhibit this attitude prior to impact. Usually, this is initiated by a stall at low altitude (e.g. through a failed winch launch or at final approach) which causes the glider to spin until ground impact. This kind of accident occurs most frequently and usually results in severe or fatal injuries.

For the present study an additional side slip angle of 5° has been introduced in order to perturb the symmetry. This approach is believed to be more conservative and closer to reality than the symmetrical case. The aircraft impacts the rigid ground at time step $t = 0$ having a total velocity $\vec{V}_i = 80$ km/h and 130 kJ kinetic energy. Additionally, gravity forces act throughout the entire crash simulation. The friction between the aircraft and the ground has been considered by a friction coefficient of $\mu_g = 0.4$.

Figure 4 shows the resulting crash behavior. At $t = 36$ ms the upper longerons start to fail, resulting in a decrease of the

fuselage bending stiffness. Due to this, the nose section loses part of the supporting structure and no longer contributes to the energy absorption. This shows, that a crash element mounted at the fuselage nose would be rather ineffective. At $t = 65$ ms the fuselage bottom shell fails due to increasing bending stresses. As a result, the cockpit stops collapsing at the front seat position. However, the survival space of the rear occupant begins to shrink which is further driven by the failure of the aft longerons at $t = 105$ ms. The occupant in the rear seat experiences a very high vertical acceleration which will probably result in severe spinal injuries upon ground impact. Figure 5 shows the significant increase in acceleration at the hip centre node between 90 and 180 ms.

For comparison, Ref. 11 describes a similar crash behavior of an airshow accident, where the glider experienced a stall at the downwind leg. This aircraft had the same initial attitude before impact as discussed above and also exhibited a premature failure of the forward fuselage in a very similar fashion. According to Ref. 1 crashed glider cockpits generally show the most severe structural damage in the area of the occupant seats. Particularly, in the case of composite gliders the majority of these spinning accidents cause fatal injuries, namely more than 70%. Reference 1 also shows that the overall safety of metal or wooden glider designs is superior to CFRP airframes, because the brittle failure modes of carbon fibre composites generally result in a poor energy absorption.

Integration concept for θ -6-Gel

The deficiencies of the baseline design reveal the need for an increased stiffness of the cockpit section which provides the survival space. This can be efficiently addressed by distinct upper and lower longerons. While most gliders have a canopy frame which can be referred to as upper longerons, there are generally no lower longerons. Consequently, the basic design idea has been to introduce keel beams in order to increase the fuselage bending stiffness about the lateral axis of the aircraft.

Figure 6 shows the general arrangement of the final design with two keel beams integrated in the baseline fuselage. They extend from the nose wheel to the main landing gear. Two keel beams in parallel have been chosen to provide a centre channel that can accommodate rods or wires of the control system. As shown in Fig. 7 both beams have a box cross-section with a height of 60 mm and a width of 50 mm throughout their length. They are made from 2 mm thick laminates of aramid fibre reinforced plastic (AFRP) which enclose a θ -6-Gel core. Again, for simplicity, a quasi-isotropic layup has been applied. AFRP has been chosen as skin material due to its high toughness and energy absorption capability. As the silicone material is incompressible this kind of design is expected to improve pre- and post-failure stability and thus postpone or prevent a complete collapse of the cockpit structure. Moreover, the keel beams are positioned underneath the seats in order to provide additional protection to the occupants similar to the design concepts presented in [2] and [12]. The only modifications necessary for the

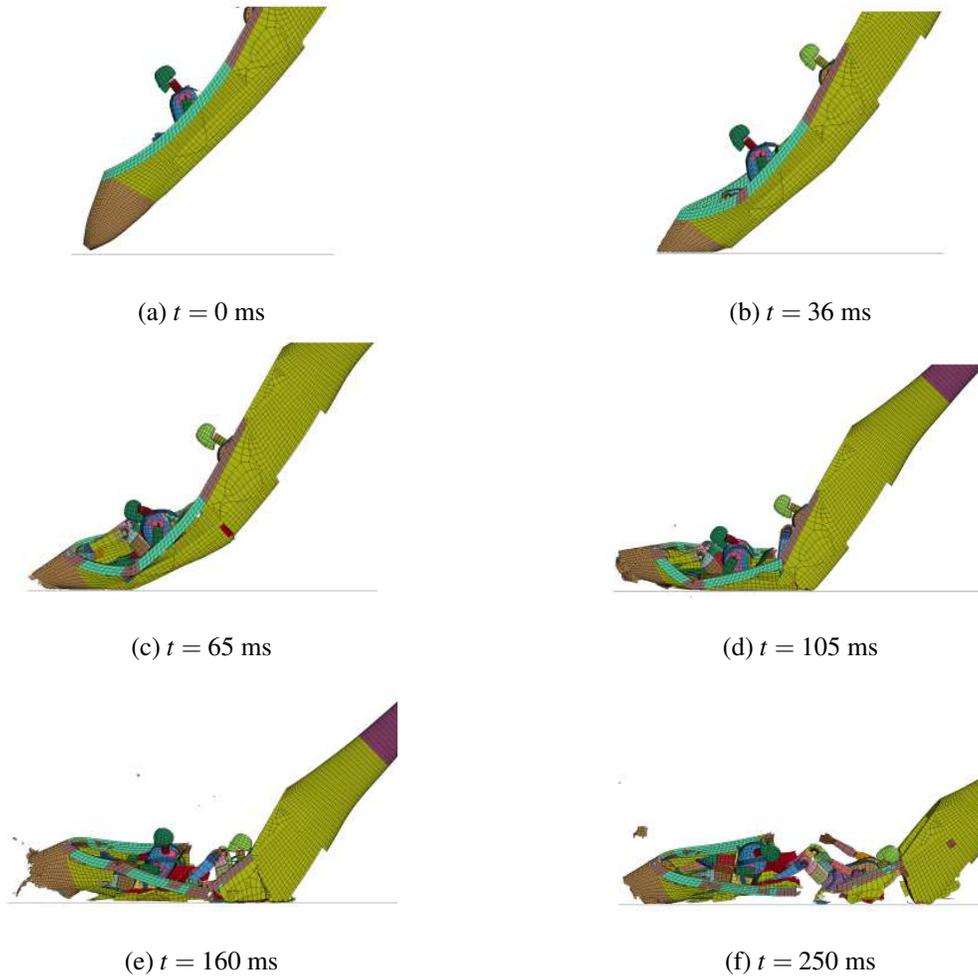


Fig. 4: Crash sequence of the baseline model

keel beam integration are cut-outs in the two stick bulkheads. The gross mass of one keel beam including the AFRP shell as well as the θ -6 core is 6.85kg. For the θ -6-Gel the LS-DYNA material constitutive model MAT 181 is used in the simulation. It specifically accounts for the nonlinear stress-strain behavior and damping properties which have been determined by static and dynamic tests [7].

Crashworthiness improvements through θ -6-Gel keel beams

Parametric study

In order to assess the feasibility of the keel beam approach the influence on the crash behavior has been investigated for a number of different fuselage structures. These were established by varying three design parameters of the baseline model, which are shown in Table 3. The idea behind the skin thickness variation of the fuselage shell and the upper longerons is to cover various structural design concepts. The aim of altering the laminate thickness of the forward tail boom has been to examine the

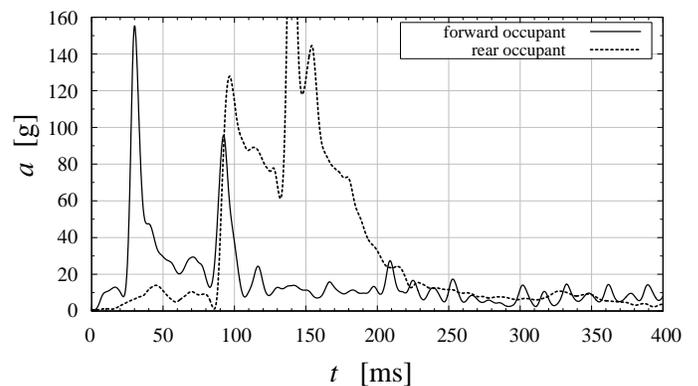


Fig. 5: Total hip accelerations at the forward and the rear occupant (baseline structure)

effect of preventing or triggering a premature tail boom failure on the crash behavior of the forward fuselage. Except for these modifications the fuselage remains the same and complies with

Table 3: Varied laminate thickness

Structural element	t_1 [mm]	t_2 [mm]	t_3 [mm]
Fuselage shell sandwich skin	0.5	1.0	2.0
Upper longeron sandwich skin	0.5	1.0	2.0
Forward tail boom laminate	2.0	4.0	—

the baseline structure according to Table 2.

The parameter variation results in 18 different structures, each of which has been investigated with and without keel beams, respectively. For clarity each model is labeled as follows:

- M[klm] model variant without keel beam
- M[klm]KB model variant with keel beam

The indices k , l and m denote the three laminate thicknesses t_i considered in the study and given in Table 3. They refer to the following structural elements:

- $k \rightarrow$ index of the fuselage skin thickness
- $l \rightarrow$ index of the upper longeron skin thickness
- $m \rightarrow$ index of the forward tail boom thickness

For example, “M321KB” indicates a crash model with keel beam, having a fuselage skin thickness $t_3 = 2.0$ mm, an upper longeron skin thickness $t_2 = 1.0$ mm and a tail boom thickness $t_1 = 2.0$ mm. Depending on the variant, the total mass thus ranges from 528.5 kg (M111) to 592.63 kg (M332KB).

Assessment

The assessment of occupant safety is essentially based on the total acceleration

$$a(t) = |\vec{a}(t)| = \sqrt{a_x(t)^2 + a_y(t)^2 + a_z(t)^2}$$

at the centre hip node of the respective dummy. The severity of injuries is rated by an anthropological measure that expresses

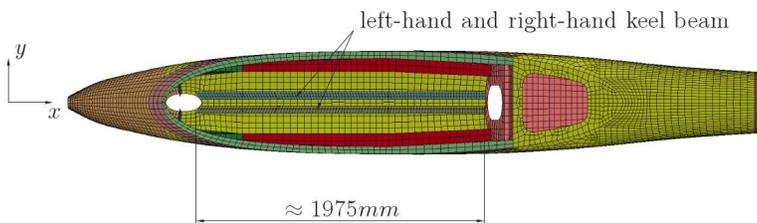


Fig. 6: Integration of two keel beams (seat shells are not shown)

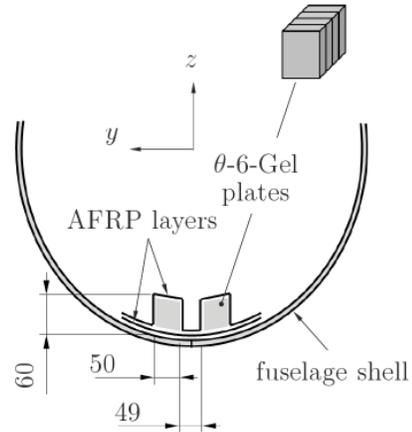



Fig. 7: Cockpit cross-section showing the keel beam integration concept (dimensions in mm)

the nodal acceleration history in terms of a scalar value. A typical example for such a measure is the so-called *Head Injury Criterion (HIC)* [13]:

$$HIC = \max \left[(t_2 - t_1) \left(\frac{1}{t_2 - t_1} \int_{t_1}^{t_2} a(t)^{\text{head}} dt \right)^{2.5} \right] \quad (1)$$

This index is determined by integrating the actual nodal acceleration $a(t)$ between time t_1 and t_2 which must be chosen to yield the maximum value. While equation (1) assumes certain units, namely acceleration in g and time in ms, the *HIC* itself has no units. It comprises not only the acceleration magnitude but also the duration, i.e. a short impulsive peak is not necessarily more severe than a moderate but long lasting acceleration. With regard to crash applications the time interval $(t_2 - t_1)$ is usually limited to 36 ms, which is denoted by HIC_{36} .

A similar methodology was chosen in this study to assess the spinal loading of the occupants. This proved to be necessary due to the lack of well established specific criteria. The applied criterion is designated IC_{36}^{hip} in order to show that it refers to the

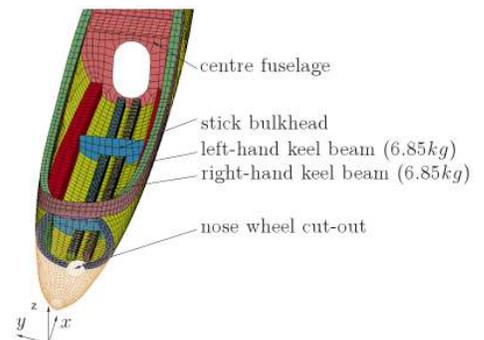

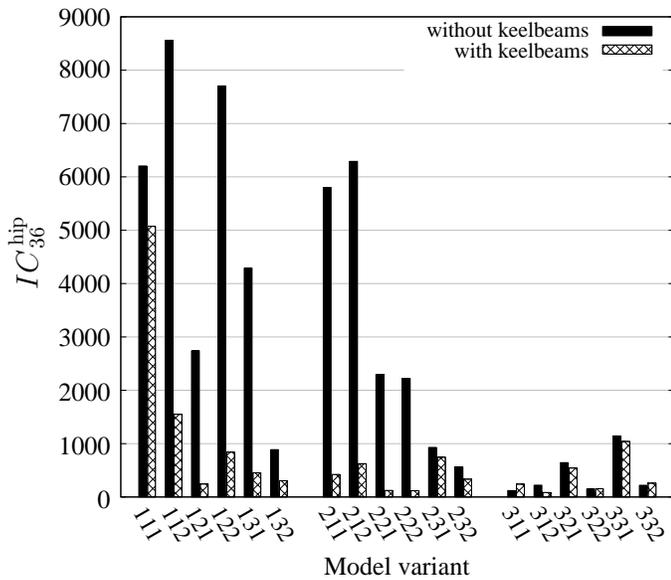


Fig. 8: Comparison of the rear occupant's IC_{36}^{hip}

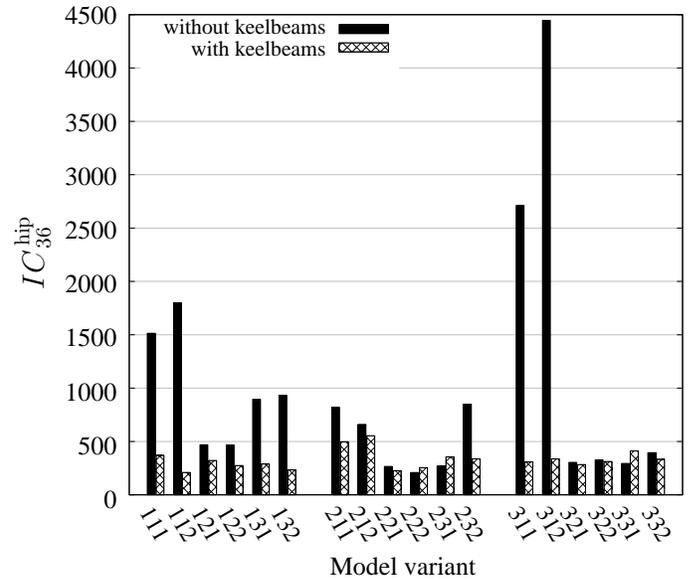


Fig. 9: Comparison of the forward occupant's IC_{36}^{hip}

hip acceleration. It is determined by:

$$IC_{36}^{\text{hip}} = \max \left[(t_2 - t_1) \left(\frac{1}{t_2 - t_1} \int_{t_1}^{t_2} a(t)^{\text{hip}} dt \right)^{2.5} \right]$$

with $t_2 - t_1 \leq 36 \text{ ms}$ (2)

This approach has been assumed feasible, because the included weighting of acceleration and duration provides an adequate measure of the occupant injuries. In order to reduce numerical noise the acceleration history $a(t)$ has been low-pass filtered prior to the calculation of the IC_{36}^{hip} .

Figures 8 and 9 summarize the resulting values at the respective occupant for all variants investigated. As a major finding, the θ -6-Gel keel beams reduce the IC_{36}^{hip} in most cases. This is especially true for less stiff fuselage structures, represented by the models M1xx and M2xx. In 5 out of 18 cases the IC_{36}^{hip} decreases only for one occupant, whereas the other is exposed to higher accelerations. However, the IC_{36}^{hip} reduction gained is always of greater magnitude than any increase of this parameter. Also it affects the occupant with the higher load. Obviously, the proposed keel beam concept improves occupant safety considerably, at least within the scope of this study. In the following section two crucial structural variants, M112 and M312, are discussed in more detail in order to thoroughly examine the specific crash mechanisms of the keel beams.

Model variant M112

This variant has relatively thin sandwich skins in the fuselage shell and the upper longerons but a relatively thick tail boom

laminates. Figure 10 shows the crash behavior of this structure without keel beams. At $t = 38.5 \text{ ms}$ the fuselage shell as well as the upper longerons start to fail due to increasing bending loads. Damage growth separates the forward from the rear cockpit section. The forward part starts rotating and the crash front reaches the forward seat at $t = 90 \text{ ms}$. The acceleration-time history of Fig. 11 indicates a distinct acceleration peak at this point. During the further course the energy absorption is almost entirely limited to the aft cockpit structure. Due to the loss of structural integrity the rear occupant hits the ground severely at $t = 130 \text{ ms}$. Figure 12 reveals a rather high acceleration with a maximum IC_{36}^{hip} of 8555 which is the highest value within the scope of the parameter study.

The crash sequence of this fuselage variant with keel beams (M112KB) is shown in Fig. 13. When the crash front approaches the keel beams at $t = 30 \text{ ms}$ the increased fuselage stiffness causes a more distinct rotation about the aircraft lateral axis compared to the version without keel beams. As a result the forward occupant experiences an increased acceleration as shown in Fig 11. After a similar fuselage failure at $t = 38.5 \text{ ms}$ the tough keel beams prevent the breakup of the cockpit section. At $t = 90 \text{ ms}$ they are being bent at the aft stick bulkhead. Since the θ -6-Gel is entirely encased the keel beam stiffness is maintained to some extent. This effect decreases the front seat accelerations observed at $t = 105 \text{ ms}$. In the further course the keel beams delay the collapse of the aft survival space until they finally separate from the bottom fuselage shell. At $t = 135 \text{ ms}$ the rear occupant additionally benefits from the damping of the seat, owing to the θ -6-Gel material. The diagrams in Figs. 11 and 12 clearly show that the total acceleration of both occupants is significantly reduced by adding the keel beams.

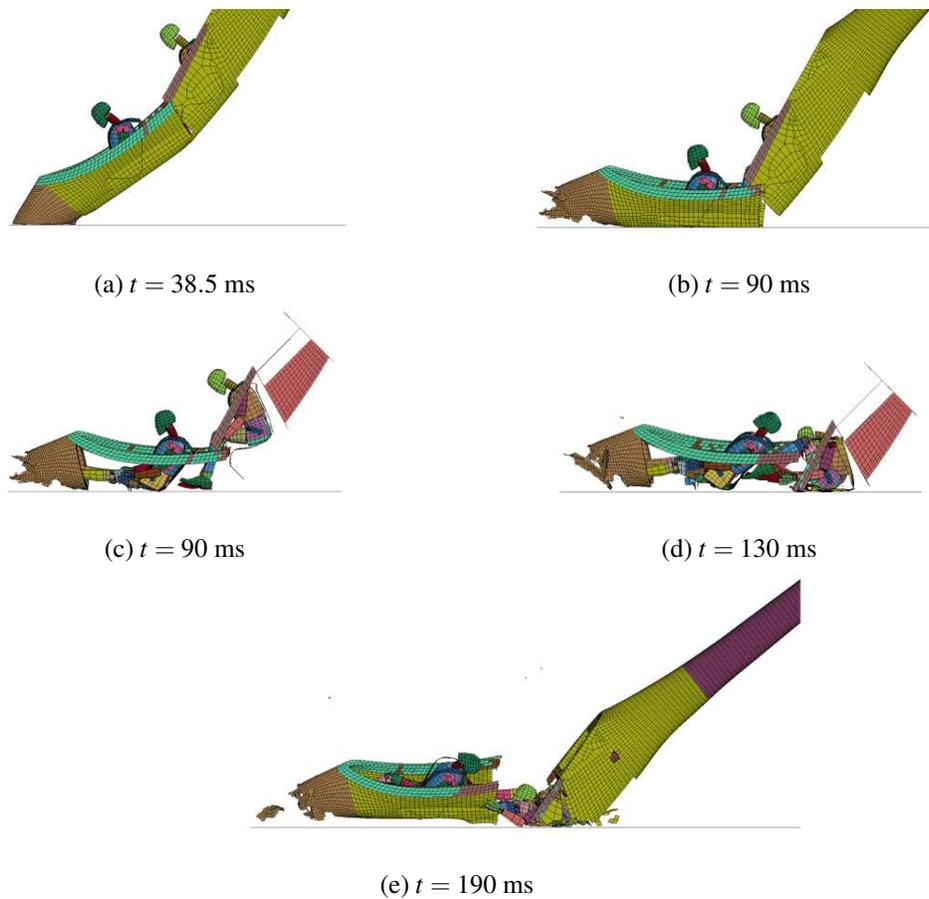


Fig. 10: Crash sequence of variant M112. Fuselage shell and consoles are not shown in (c) and (d).

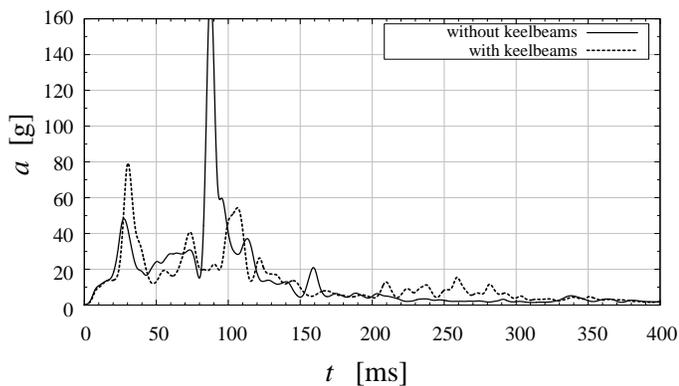


Fig. 11: Forward occupant acceleration (variant M112)

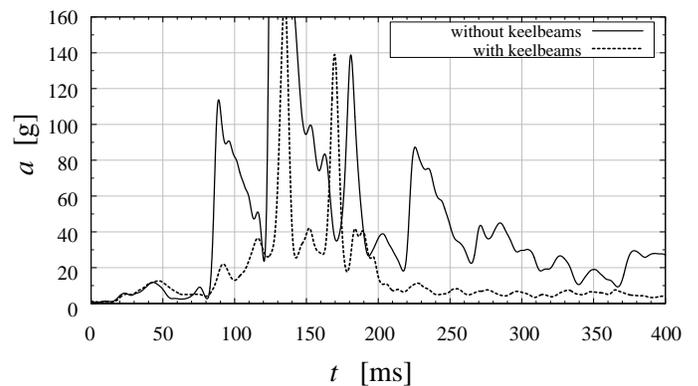


Fig. 12: Rear occupant acceleration (variant M112)

Model variant M312

The second model to be discussed has a stiff fuselage shell, thin upper longerons and a stiff tail boom. Within the parameter study this variant yields the highest IC_{36}^{hip} for the forward occupant. Through the introduction of keel beams this parameter can be reduced considerably from 4447 to 336. Figure 14 depicts the

crash sequence of the fuselage without keel beams. At $t = 42$ ms the upper longerons start to fail close to the front seat position. Due to the early collapse of the nose section the forward occupant experiences high accelerations when his seat impacts the ground at $t = 78$ ms. The acceleration-time history in Fig. 15 reaches a peak of 275 g at this point. Due to the load direction

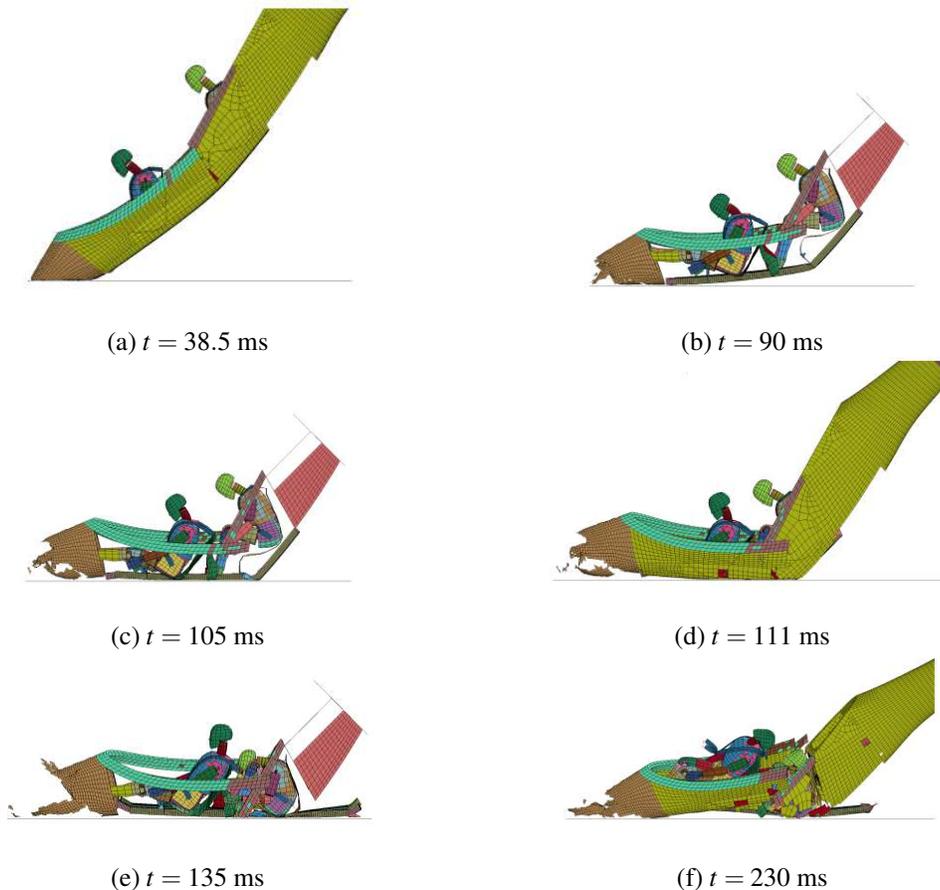


Fig. 13: Crash sequence of variant M112KB. Fuselage shell and consoles are not shown in (b), (c) and (e).

severe spinal injuries are most likely to occur in this case. In contrast to the variant *M112*, the cockpit structure collapses at the front seat position, even though the fuselage is stiffer. The acceleration of the occupant in the rear seat is relatively low, because the stiff tail boom maintains its integrity and thus retards the fuselage rotation.

Figure 16 depicts the crash scenario with keel beams installed (M312KB). To provide a better view on the occupants the fuselage shell as well as the consoles are not shown. The acceleration-time history presented in Fig. 15 reveals an almost identical crash behavior until the crash front reaches the keel beams at $t = 38$ ms. The first peak in acceleration is caused by the ground impact of the pilot's feet. At time $t = 60$ ms the fuselage structure starts to fail at the forward stick bulkhead. Compared to the version without keel beams the cockpit does not collapse completely. The keel beams support the forward seat and delay its ultimate impact until $t \approx 83$ ms. Also, the maximum occupant acceleration is reduced from 275 g to approximately 60 g.

These significant improvements of the crash behavior are caused by the following effects:

- enhanced energy absorption of the fuselage nose section

due to an increased cockpit stiffness

- early beginning of seat acceleration prior to its ultimate ground impact
- additional seat damping through the θ -6-Gel core when the fuselage bottom hits the ground

Discussion of the general feasibility

The 36 different fuselage structures investigated may only represent a small fraction of possible crash scenarios. Depending on soil properties, impact velocities, material properties etc., crash sequences are manifold in reality. However, in this first approach it could be shown that the keel beams considered here improve occupant safety in every case examined which substantiates the general feasibility to some extent. Due to the reinforcement of the entire survival space this design approach is expected to improve crashworthiness throughout a wide variety of crash situations. The keel beams are particularly considered suitable for those glider types having a rather short nose section where dedicated crash elements can not be applied. However, there are also shortcomings. For example, the keel beams have to follow the fuselage contour and are thus type-specific. Also,

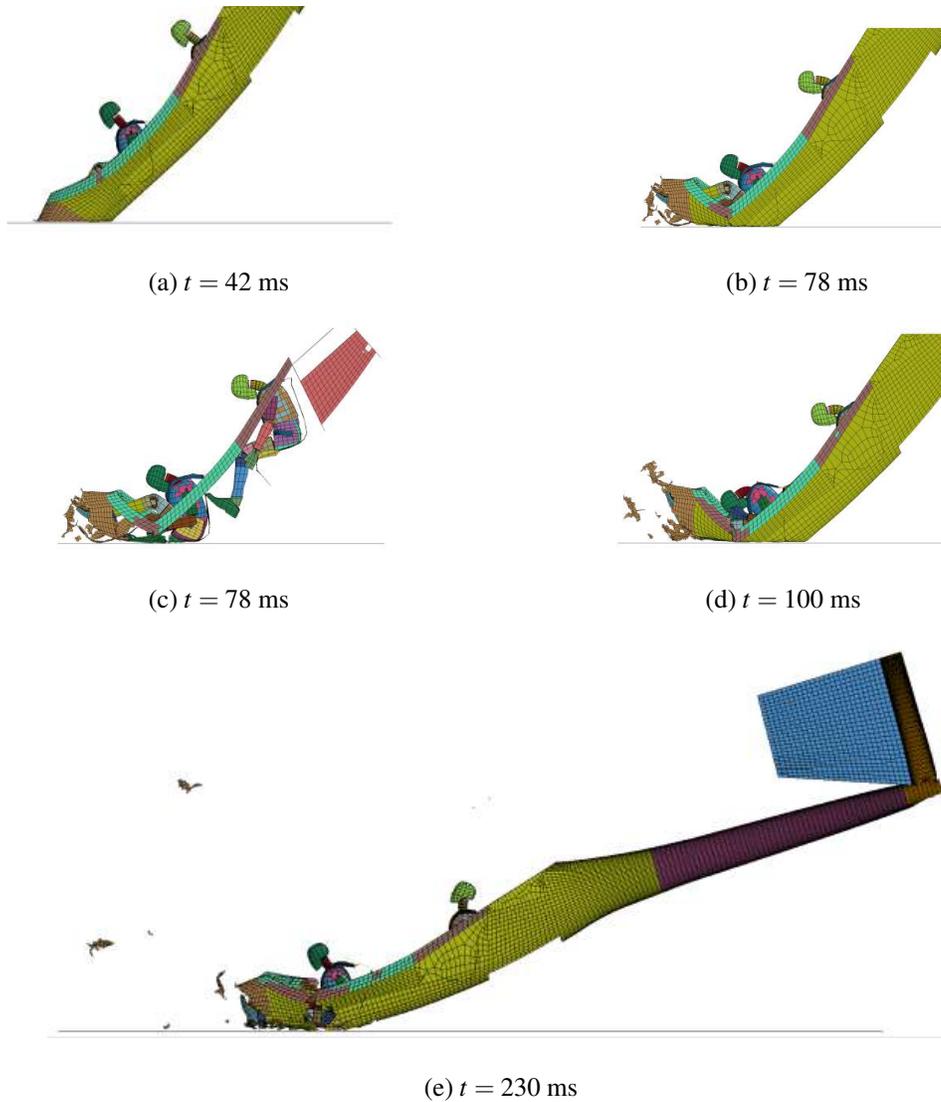


Fig. 14: Crash sequence of variant M312. Fuselage shell and consoles are not shown in (c).

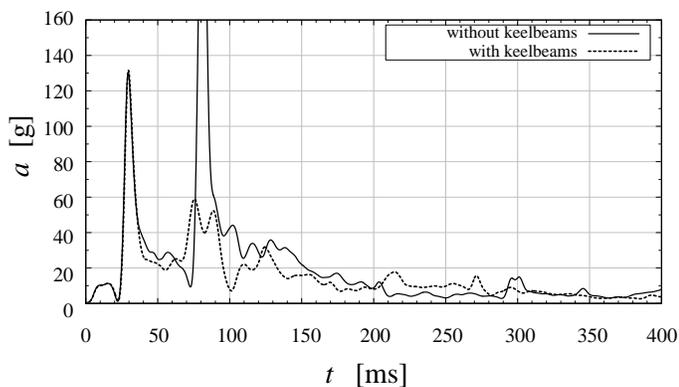


Fig. 15: Forward occupant acceleration (variant M312)

modern sailplanes usually offer very little space for the integration of distinct keel beams under the seats. Hence, the proposed design is not applicable as a retrofit solution.

Summary

A study was conducted to find new structural design solutions that improve occupant safety in sailplanes constructed of carbon fiber composites. The study was motivated by the tightened crashworthiness requirements released with the latest revision of EASA CS-22 in 2008.

The fundamental idea of the research was to exploit the excellent shock absorbing and damping characteristics of silicone rubber materials. Therefore, a screening has been carried out in order to identify the most appropriate material for the particular requirements. Based on the obtained results a silicone rubber

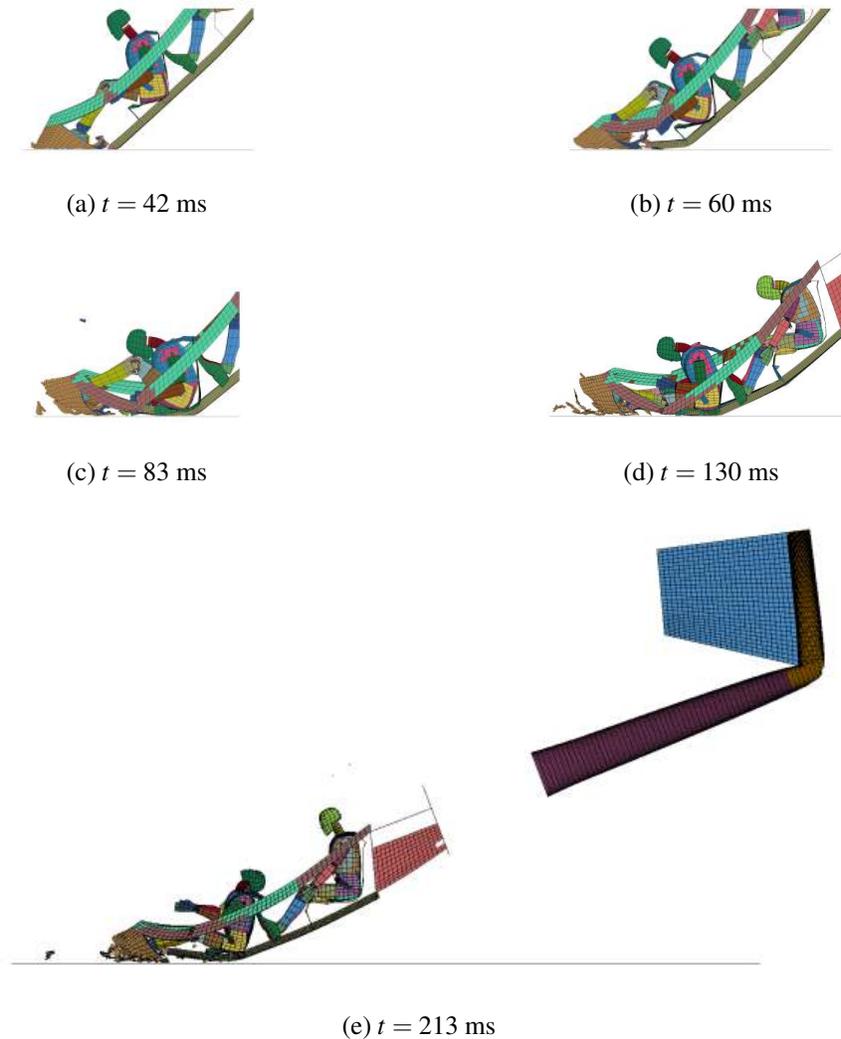


Fig. 16: Crash sequence of variant M312KB. Fuselage shell and consoles are not shown.

called θ -6-Gel has been chosen as the basic energy absorbing material.

The primary tool used to evaluate the effect of different fuselage design concepts on the crashworthiness of sailplanes has been a parametric finite element model for numerical crash simulations. This model comprises the load-bearing structural parts of a generic sailplane fuselage as well as two 50th percentile dummies in the cockpit. These dummies allow for a decent investigation of ground impact effects on the occupants. Evaluation criteria have been the total acceleration at the hip of the pilots as well as the survival space left for the occupants after the crash.

A feasibility study revealed that the most promising structural design concept is to reinforce the lower cockpit shell by keel beams filled with the θ -6-Gel material. These structural elements have a quadrilateral cross-section and are made by wrapping the silicone core in layers of AFRP fabric. Thus, the en-

closed incompressible core material enhances the bending stiffness of the beams which results in an improved survival space integrity. Since the keel beams are positioned underneath the seats, they also provide direct suspension and damping when the crash front reaches positions of the occupants. For the further investigation two parallel keel beams have been adopted in order to provide a central channel to accommodate rods and wires of the control system.

The selected structural concept has been evaluated regarding its capability to improve occupant safety by numerous crash simulations. As crash scenario a ground impact with a flight path angle of -45° and a side slip of 5° has been assumed. Several configurations of the reinforced fuselage designs have been investigated and compared to the crash behavior of the respective fuselage without keel beams. The effect of the design modifications on occupant safety has been assessed by using an average acceleration index. This factor characterizes the forces occur-

ring at the hip of the dummies and can be regarded as a measure for the severity of the injuries suffered.

The numerical study proved that occupant safety can be enhanced by reinforcing the forward fuselage by keel beams with silicone cores. Particularly, for the most severe crash cases the application of keel beams offers a considerable reduction of the impact loads acting on the occupants. Due to these findings it can be concluded that the proposed structural design concept of the forward fuselage is a feasible and promising approach to improve the crashworthiness of sailplanes.

Acknowledgments

This research project was financially supported by the German *Bundesministerium für Verkehr und Digitale Infrastruktur*. It was initiated by Mr. U. Kopp (German *Federal Aviation Office*) whose support is gratefully acknowledged.

References

- [1] Sperber, M., “Energieabsorption bei Landeunfällen mit Segelflugzeugen und Motorseglern,” Tech. Rep. FE-Nr. L-2/2005 – 50.0304/2004, TÜV Rheinland, 2008.
- [2] Taher, S., Mahdi, E., Mokhtar, A., and Magid, D., “A new Composite Energy Absorbing System for Aircraft and Helicopter,” *Composite Structures*, Vol. 75, 2006, pp. 14–23.
- [3] Röger, W., Conradi, M., and Ohnimus, T., “Insassensicherheit bei Luftfahrtgerät,” Tech. Rep. FE-L-4/94-50129/94, FH Aachen, 1996.
- [4] EASA, *Certification Specifications for Sailplanes and Powered Sailplanes CS-22*, 2008, Amendment 1, AMC 22.561.
- [5] Röger, W., *Safe and Crashworthy Cockpit*, FH Aachen, Fachbereich Luft- und Raumfahrttechnik, 2007.
- [6] Bossak, M. and Kaczkowski, J., “Global/Local Analysis of Composite Light Aircraft Crash Landing,” *Computers and Structures*, Vol. 81, 2003, pp. 503–514.
- [7] Schuster, U., Hähnel, F., and Wolf, K., “On the Applicability of Alpha-Gel in General Aviation Aircraft for Improved Crashworthiness,” Tech. Rep. TR 13-17, FE-Nr. 50.0346/2011, Technische Universität Dresden, Institute of Aerospace Engineering, 2014.
- [8] Taica Corp., Tokyo, Japan, *Alpha-Gel Products Catalog*, 2011.
- [9] Taica Corp., Tokyo, Japan, *Products for Shock Absorption*, 2012.
- [10] IDAFLIEG — Interessengemeinschaft Deutscher Akademischer Fliegergruppen, *Dimensionierungsrichtwerte für den Segel- und Motorsegelflugzeugbau*, 1988.
- [11] “Air show crash drama: Pilot’s amazing escape as stunt glider smashes into runway as 15,000 fans look on,” Daily Mail Online, 2010.
- [12] Kellas, S. and Jr., N. F. K., “Design, Fabrication, and Testing of Composite Energy-Absorbing Keel Beams for General Aviation Type Aircraft,” Tech. Rep. CR-2002-212133, NASA, 2002.
- [13] Digges, K., “Injury Measurements and Criteria,” *Models for Aircrew Safety Assessment: Uses, Limitations and Requirements*, NATO. RTO Meeting Proceedings 20, 1999.

Preparation of Manuscripts for Submission to *Technical Soaring*

Technical Soaring (TS) seeks to document recent advances in the science, technology and operations of motorless aviation. TS welcomes original contributions from all sources.

General Requirements Manuscripts must be unclassified and cleared for public release. The work must not infringe on copyrights, and must not have been published or be under consideration for publication elsewhere. Authors must sign and submit a copyright form at time of submission. The form is available at www.ostiv.org.

Layout Submit manuscripts in **single-column, double line-spacing** format. This is not a “camera-ready” layout but facilitates review and typesetting. Set up margins so the pages will print on both US Letter and A4. Use approximately 1 1/4 in. (3 cm) margins.

Language All manuscripts submitted to TS must be in English. Submissions requiring extensive editing may be returned to author for proofreading and correction prior to review.

Electronic files Acceptable data file formats for text are, in order of preference, PDF, DVI, Latex Source, Open Office, and all others including Microsoft Word. If in doubt, ask the Editor. Submit one file containing the complete paper including all figures and tables (for review purposes), and, separately, a complete set of graphics files containing the individual figures, one per file. Graphics files must be in one of the following formats: EPS (preferred), EPSF, PS, PDF, JPG (JPEG), GIF, TIF (TIFF), PNM, PBM, PGM, PPM, PNG, SVG, or BMP.

Length There is no fixed length limit. At the discretion of the Editor, manuscripts exceeding approximately 50 double-spaced pages (including figures and tables one per page) may be returned to the author for reduction in length.

Font For the text, use any common font in 12pt — e.g. Times, Helvetica, Courier or equivalents.

Structure Organize papers in sections, subsections, and, as needed, subsubsections. Preferred heading style is section headings centered in bold face; subsection headings left-justified in bold face; and subsubsection headings left-justified in italics. Do not number sectional units. Capitalize first letters only — do not use “all-caps” in headings.

Title Title block should include author name(s), affiliation(s), location, and contact info (email address preferred). In the title, capitalize first letters only — do not use “all-caps.”

Abstract All papers require a summary-type abstract. Abstracts must consist of a single, self-contained paragraph. Suggest 100 to 150 words. Acronyms may be introduced in the abstract, but do not cite references, figures, tables, or footnotes.

Nomenclature If the paper uses more than a few symbols, list and define them in a table in a separate section following the abstract. Define acronyms in the text following first use in text — not in the Nomenclature list.

Introduction The Introduction should state the purpose of the work and its significance with respect to prior literature, and should enable the paper to be understood without undue reference to other sources.

Conclusions Although the Conclusions section may review the main points of the paper, it must not replicate the abstract. Do not cite references, figures, or tables in the Conclusions section as all points should have been made in the body of the paper.

Acknowledgments This section may be used to acknowledge technical assistance, organizational sponsorship, or financial or other support. Inclusion of support and/or sponsorship acknowledgments is strongly encouraged.

Citations Cite with bibliographic reference numbers in brackets (e.g. “[7]”). When used as subject or predicate of a sentence, use “Ref. 7” or “Reference 7.” Do not cite Internet URLs unless the website itself is the subject of discussion.

References The list of References is placed after the body of the text,

after the Conclusions but before any Appendices. List references in order of first citation in the text. Any format is acceptable as long as all citation data are provided. At a minimum, all types of entries require title, year and manner of publication. Provide full names of all authors. Do not list Internet URLs as sources.

Tables Tables must be provided as editable text. Do not submit graphic images of tables.

Figures Place figures and tables at the end of the manuscript, one per page, each with its caption.

Captions All figures and tables require captions. Captions should state concisely what data are presented. Brief explanatory comments are acceptable but any discussion of the data presented in a figure or table should be placed in the section of the text referring to it — not in the caption. Provide captions as editable text separate from the figure or table it presents. Do not use the caption to explain line styles and symbols — use a legend instead.

Color *Technical Soaring* is printed in greyscale. Color graphics are acceptable but authors must ensure that they are printable and understandable in greyscale. When presenting data, use line styles, symbol shapes, and fill patterns to distinguish sets of data — not color or shades of grey. Figures submitted in color will appear in color in the online version of the journal and in greyscale in the printed version.

Footnotes Use footnotes sparingly. Do not footnote to cite literature.

Numbering Figures, tables, footnotes and references will not be included unless they are referenced by number in the text. Numbering runs sequentially in order of first mention in the text. Figure and table numbers are maintained separately. Equations are numbered only if they are referenced by number in the text. Number every page.

Abbreviations Do not begin sentences with abbreviations. Otherwise, use “Fig.” for “Figure” and “Ref.” for “Reference.” Do not abbreviate “Table”. The abbreviations “i.e.” and “e.g.” are not italicized.

How to submit Submit manuscripts online at the *Technical Soaring* website or email files to the Editor. Include a copyright form (available at www.ostiv.org). Authors may also submit electronic media by postal mail — contact Editor for address. Upon receipt, the Editor will assign a paper log number, assign an Associate Editor to oversee the review process, and acknowledge receipt by email. Authors who do not receive acknowledgment within 30 days should contact the Editor.

Peer Review Manuscripts will be peer-reviewed before being accepted for publication. Authors are welcome to suggest names of reviewers and to contact the Editor or the assigned Associate Editor at any time for updates on the status of their review. Reviews will commence only when:

1. The manuscript begins with a title block and a summary-type abstract.
2. A nomenclature list is provided or, if only a few symbols are used, they are defined in the text.
3. An introduction is provided that states the purpose of the work and its significance with respect to prior literature.
4. All pages are numbered.
5. All figures, footnotes and tables are numbered and referenced in the text.
6. All references cited in the text are in the list of references, and vice versa.
7. All reference list entries include complete bibliographic citation data.
8. All figures and tables are provided with captions.
9. A completed and signed copyright form has been provided.

Charges *Technical Soaring* does not require a publication page-charge.